

# REVISION RECORD FOR THE STATE OF CALIFORNIA

## ERRATA

January 1, 2023

### 2022 Title 24, Part 11, California Green Building Standards Code

#### General Information:

1. The date of this erratum is for identification purposes only. See the History Note Appendix on the back side or accompanying page.
2. This erratum is issued by the California Building Standards Commission to correct nonsubstantive printing errors or omissions in the 2022 California Green Building Standards Code, California Code of Regulations, Title 24, Part 11. Instructions are provided below.
3. Health and Safety Code Section 18938.5 establishes that only building standards in effect at the time of the application for a building permit may be applied to the project plans and construction. This rule applies to both adoptions of building standards for Title 24 by the California Building Standards Commission, and local adoptions and ordinances imposing building standards. An erratum to Title 24 is a non-regulatory correction because of a printing error or omission that does not differ substantively from the official adoption by the California Building Standards Commission. Accordingly, the corrected code text provided by this erratum may be applied on and after the stated effective date.
4. You may wish to retain the superseded material with this revision record so that the prior wording of any section can be easily ascertained.

#### Title 24, Part 11

##### Remove Existing Pages

iii and iv  
2-1 through 2-10  
3-1 and 3-2  
4-3 and 4-4  
5-1 and 5-2  
5-9 and 5-10

APPENDIX A4-21 and APPENDIX A4-22  
APPENDIX A5-1 through APPENDIX A5-4  
APPENDIX A5-11 and APPENDIX A5-12  
APPENDIX A5-25 and APPENDIX A5-26  
APPENDIX A5-31 and APPENDIX A5-32  
APPENDIX A5-37 and APPENDIX A5-38  
HIST-1 and HIST-2

##### Insert Buff-Colored Pages

iii and iv  
2-1 through 2-10  
3-1 and 3-2  
4-3 and 4-4  
5-1 and 5-2  
5-9 and 5-10

APPENDIX A4-21 and APPENDIX A4-22  
APPENDIX A5-1 through APPENDIX A5-4  
APPENDIX A5-11 and APPENDIX A5-12  
APPENDIX A5-25 and APPENDIX A5-26  
APPENDIX A5-31 and APPENDIX A5-32  
APPENDIX A5-37 and APPENDIX A5-38  
HIST-1 and HIST-2



## PREFACE

This document is Part 11 of thirteen parts of the official triennial compilation and publication of the adoptions, amendments and repeal of administrative regulations to *California Code of Regulations, Title 24*, also referred to as the *California Building Standards Code*. This part is known as the *California Green Building Standards Code*, and it is intended that it shall also be known as the *CALGreen Code*.

The *California Building Standards Code* is published in its entirety every three years by order of the California legislature, with supplements published in intervening years. The California legislature delegated authority to various state agencies, boards, commissions and departments to create building regulations to implement the State's statutes. These building regulations, or standards, have the same force of law, and take effect 180 days after their publication unless otherwise stipulated. The *California Building Standards Code* applies to occupancies in the State of California as annotated.

A city, county, or city and county may establish more restrictive building standards reasonably necessary because of local climatic, geological or topographical conditions. Findings of the local condition(s) and the adopted local building standard(s) must generally be filed with the California Building Standards Commission (or other filing if indicated) to become effective, and may not be effective sooner than the effective date of this edition of the *California Building Standards Code*. Local building standards that were adopted and applicable to previous editions of the *California Building Standards Code* do not apply to this edition without appropriate adoption and the required filing.

Should you find publication (e.g., typographical) errors or inconsistencies in this code or wish to offer comments toward improving its format, please address your comments to:

California Building Standards Commission  
2525 Natomas Park Drive, Suite 130  
Sacramento, CA 95833-2936  
Phone: (916) 263-0916  
Email: [cbcs@dgs.ca.gov](mailto:cbcs@dgs.ca.gov)  
Web page: [www.dgs.ca.gov/bcs](http://www.dgs.ca.gov/bcs)

## ACKNOWLEDGMENTS

The 2022 *California Building Standards Code* (Code) was developed through the outstanding collaborative efforts of the Department of Housing and Community Development, Division of State Architect, Office of the State Fire Marshal, Office of Statewide Health Planning and Development, California Energy Commission, California Department of Public Health, California State Lands Commission, Board of State and Community Corrections and the California Building Standards Commission (Commission).

This collaborative effort included the assistance of the Commission's Code Advisory Committees and many other volunteers who worked tirelessly to assist the Commission in the production of this Code.

*Governor Gavin Newsom*  
*Members of the California Building Standards Commission*  
*Secretary Yolanda Richardson – Chair*  
*Rajesh Patel – Vice-Chair*  
*Erick Mikiten*                      *Elley Klausbruckner*  
*Aaron Stockwell*                *Juvilyn Alegre*  
*Peter Santillan*                 *Kent Sasaki*  
*Laura Rambin*  
*Mia Marvelli – Executive Director*  
*Michael L. Nearman – Deputy Executive Director*

For questions on California state agency amendments, please refer to the contact list on page v.

# LEGEND FOR AGENCY ADOPTIONS

Unless otherwise noted, state agency adoptions are indicated by the following banners in the section leaders:

Department of Housing and Community Development: **[HCD]**

California Building Standards Commission, *CALGreen*: **[BSC-CG]**

Division of the State Architect, Structural Safety: **[DSA-SS]**

Office of Statewide Health Planning and Development: **[OSHDP 1, 1R, 2, 4 & 5]**

See Chapter 1, Sections 103–106 for applications regulated by the respective state agencies.

## EFFECTIVE USE OF THIS CODE

The format of this code is common to other parts of the *California Building Standards Code* and contains building standards applicable to occupancies which fall under the authority of different state agencies. Occupancies and applications under the authority of a specific state agency are identified in Chapter 1, Sections 103 through 106. Sections of this code which are applicable and adopted by each state agency are identified in the Matrix Adoption Tables located at the beginning of each chapter. The following outline is provided as a guide to establish which provisions are applicable to a specific occupancy.

1. Establish the type of occupancy.
2. Verify which state agency has authority for the established occupancy by reviewing the authorities list in Sections 103 through 106.
3. Once the appropriate agency has been identified, find the chapter which covers the established occupancy.
4. The Matrix Adoption Tables at the beginning of Chapters 4 and 5 identify the required green building measures necessary to meet the minimum requirements of this code for the established occupancy.
5. Voluntary tier measures are contained in Appendix Chapters A4 and A5. A Checklist containing each green building measure, both required and voluntary is provided at the end of each appendix chapter. Each measure listed in the application checklist has a section number which correlates to a section where more information about the specific measure is available.
6. The Application Checklist identifies which measures are required by this code and allows users to check-off which voluntary items have been selected to meet voluntary tier levels if desired or mandated by a city, county, or city and county.

# CALIFORNIA GREEN BUILDING STANDARDS CODE – MATRIX ADOPTION TABLE

## CHAPTER 2 – DEFINITIONS

(Matrix Adoption Tables are nonregulatory, intended only as an aid to the code user.

See Chapter 1 for state agency authority and building applications.)

Adopting agency	BSC	BSC-CG	SFM	HCD			DSA		OSHDP						BSCC	DPH	AGR	DWR	CE C	CA	SL	SLC
				1	2	1/AC	AC	SS	1	1R	2	3	4	5								
Adopt entire CA chapter		X		X				X														
Adopt entire chapter as amended (amended sections listed below)									X		X		X									
Adopt only those sections that are listed below																						
Chapter/Section																						
201																						
CALIFORNIA RESIDENTIAL CODE									†		†		†									
LOW-RISE RESIDENTIAL BUILDING									†		†		†									
PLANTS									†		†		†									
RESIDENTIAL BUILDING									†		†		†									
RESILIENT FLOORING									†		†		†									

The state agency does not adopt sections identified by the following symbol: †.

## CHAPTER 2

## DEFINITIONS

### SECTION 201 GENERAL

**201.1 Scope.** Unless otherwise stated, the following words and terms shall, for the purposes of this code, have the meanings shown in this chapter.

**201.2 Interchangeability.** Words used in the present tense include the future; words stated in the masculine gender include the feminine and neuter; the singular number includes the plural and the plural, the singular.

**201.3 Terms defined in other documents.** Where terms are not defined in this code and are defined in the *California Building Standards Code* or other referenced documents, such terms shall have the meanings ascribed to them as in those publications.

**201.4 Terms not defined.** Where terms are not defined as specified in this section, such terms shall have ordinarily accepted meanings such as the context implies.

### SECTION 202 DEFINITIONS

**ACCESSORY DWELLING UNIT. [HCD]** An attached or detached residential dwelling unit that provides complete independent living facilities for one or more persons and is located on a lot with a proposed or existing primary residence. Accessory dwelling units shall include permanent pro-

visions for living, sleeping, eating, cooking and sanitation on the same parcel as the single-family or multifamily dwelling is or will be situated. (See Government Code Section 65852.2.)

**ACCESSORY OCCUPANCIES. [HCD]** Occupancies that are ancillary to the main occupancy of residential building(s) or portions thereof. Accessory occupancies shall include, but are not limited to, Group U occupancies. (See Section 312 of the *California Building Code*.)

**ACCESSORY STRUCTURE. [HCD]** A structure that is accessory to and incidental to that of the dwelling(s) and that is located on the same lot.

**ADDITION.** An extension or increase in floor area of an existing building or structure.

**ADJUST.** To regulate fluid flow rate and air patterns at the terminal equipment, such as to reduce fan speed or adjust a damper.

**AGRIFIBER PRODUCTS.** Agrifiber products include wheatboard, strawboard, panel substrates and door cores, not including furniture, fixtures and equipment (FF&E) not considered base building elements.

**ALBEDO.** Synonymous with solar reflectance, which is a ratio of the energy reflected back into the atmosphere to the energy absorbed by the surface, with 100 percent being total reflectance.

## DEFINITIONS

**ALTERATION OR ALTER.** Any construction or renovation to an existing structure other than repair for the purpose of maintenance or addition.

**ARB (CARB).** The California Air Resources Board.

**ARTERIAL HIGHWAY.** A general term denoting a highway primarily for through traffic usually on a continuous route.

**ASSEMBLY (ASSEMBLY PRODUCT).** An assembly (assembly product) includes or has been formulated using multiple materials.

**AUTOMATIC.** Automatic means capable of operating without human intervention.

**AUTOMATIC LOAD MANAGEMENT SYSTEM (ALMS).** [BSC-CG, DSA-SS and HCD] A system designed to manage load across one or more electric vehicle supply equipment (EVSE) to share electrical capacity and/or automatically manage power at each connection point.

**A-WEIGHTED SOUND LEVEL (dba).** The sound pressure level in decibels as measured on a sound level meter using the internationally standardized A-weighting filter or as computed from sound spectral data to which A-weighting adjustments have been made.

**BALANCE.** To proportion flows within the distribution system, including submains, branches and terminals, according to design quantities.

**BIORETENTION.** A shallow depression that utilizes conditioned soil and vegetation for the storage, treatment or infiltration of storm water runoff.

**BROWNFIELD SITE.** Real property, the expansion, redevelopment or reuse of which may be complicated by the presence or potential presence of a hazardous substance, pollutant or contaminant, with certain legal exclusions and additions.

**Note:** See the full text at the EPA's website.

**1 BTU/HOUR.** British thermal units per hour, also referred to as Btu. The amount of heat required to raise one pound of water one degree Fahrenheit per hour, a common measure of heat transfer rate. A ton of refrigeration is 12,000 Btu, the amount of heat required to melt a ton (2,000 pounds) of ice at 32° Fahrenheit.

**BUILDING COMMISSIONING.** A systematic quality assurance process that spans the entire design and construction process, including verifying and documenting that building systems and components are planned, designed, installed, tested, operated and maintained to meet the owner's project requirements.

**BUILDING ENVELOPE.** The ensemble of exterior and demising partitions of a building that enclose conditioned space.

**CALIFORNIA BUILDING CODE.** The current version of the *California Building Code*.

**CALIFORNIA ELECTRICAL CODE.** The current version of the *California Electrical Code*.

**CALIFORNIA ENERGY CODE.** The current version of the *California Energy Code*, unless otherwise specified.

**CALIFORNIA MECHANICAL CODE.** The current version of the *California Mechanical Code*.

**CALIFORNIA PLUMBING CODE.** The current version of the *California Plumbing Code*.

**CALIFORNIA RESIDENTIAL CODE.** The current version of the *California Residential Code*.

**CHLOROFLUOROCARBON (CFC).** A class of compounds primarily used as refrigerants, consisting of only chlorine, fluorine and carbon.

**COMMUNITY NOISE EQUIVALENT LEVEL (CNEL) HIGHWAY.** A metric similar to the day-night average sound level (Ldn), except that a 5 decibel (dB) adjustment is added to the equivalent continuous sound exposure level for evening hours (7 p.m. to 10 p.m.) in addition to the 10 dB nighttime adjustment used in the Ldn.

**COMPACT DISHWASHER.** A dishwasher that has a capacity of less than eight place settings plus six serving pieces as specified in ANSI/AHAM DW-1.

**COMPOSITE WOOD PRODUCTS.** Composite wood products include hardwood plywood, particleboard and medium density fiberboard. "Composite wood products" does not include hardboard, structural plywood, structural panels, structural composite lumber, oriented strand board, glued laminated timber, prefabricated wood I-joists or finger-jointed lumber, all as specified in California Code of Regulations (CCR), Title 17, Section 93120.1(a).

**Note:** See CCR, Title 17, Section 93120.1.

**CONDITIONED FLOOR AREA.** The floor area (in square feet) of enclosed conditioned space on all floors of a building, as measured at the floor level of the exterior surfaces of exterior walls enclosing the conditioned space.

**CONDITIONED SPACE.** A space in a building that is either directly conditioned or indirectly conditioned.

**CONDITIONED SPACE, DIRECTLY.** An enclosed space that is provided with wood heating, is provided with mechanical heating that has a capacity exceeding 10 Btu/hr-ft<sup>2</sup>, or is provided with mechanical cooling that has a capacity exceeding 5 Btu/hr-ft<sup>2</sup>, unless the space-conditioning system is designed for a process space. (See Process Space.)

**CONDITIONED SPACE, INDIRECTLY.** Enclosed space, including but not limited to, unconditioned volume in atria, that (1) is not directly conditioned space; and (2) either (a) has a thermal transmittance area product (UA) to directly conditioned space exceeding that to the outdoors or to unconditioned space and does not have fixed vents or openings to the outdoors or to unconditioned space, or (b) is a space through which air from directly conditioned spaces is transferred at a rate exceeding three air changes per hour.

**COOL PAVEMENT(S).** Includes, but is not limited to, high albedo pavements and coatings, vegetative surfaces, porous or pervious pavements that allow water infiltration, and pavements shaded by trees and other sources of shade.

**COOLING EQUIPMENT.** Equipment used to provide mechanical cooling for a room or rooms in a building.

**CUTOFF LUMINAIRES.** Luminaires whose light distribution is such that the candela per 1000 lamp lumens does not numerically exceed 25 (2.5 percent) at an angle of 90 degrees above nadir, and 100 (10 percent) at a vertical angle of 80 degrees above nadir. This applies to all lateral angles around the luminaire.

**DAY-NIGHT AVERAGE SOUND LEVEL ( $L_{dn}$ ).** The A-weighted equivalent continuous sound exposure level for a 24-hour period with a 10 dB adjustment added to sound levels occurring during nighttime hours (10 p.m. to 7 a.m.).

**DECIBEL (dB).** A measure on a logarithmic scale of the magnitude of a particular quantity (such as sound pressure, sound power, sound intensity) with respect to a reference quantity.

**DEMAND HOT WATER RECIRCULATION SYSTEM.** A hot water recirculation system requiring manual activation and equipped with a thermostat that will automatically shut off the recirculation pump when the water temperature reaches a preset level at the point of use.

**DEVELOPMENT FOOTPRINT.** The total area of the building footprint, hardscape, access roads and parking.

**DEWATERING.** Pumping of uncontaminated or treated groundwater for construction activities.

**DIRECT-VENT APPLIANCE.** A fuel-burning appliance with a sealed combustion system that draws all air for combustion from the outside atmosphere and discharges all flue gases to the outside atmosphere.

**DISPOSAL.** The management of solid waste through land-filling or transformation at permitted solid waste facilities.

**DIVERSION.** Activities which reduce or eliminate the amount of solid waste from solid waste disposal for purposes of this code.

**ELECTRIC VEHICLE (EV).** [BSC-CG, HCD] An automotive-type vehicle for on-road use, such as passenger automobiles, buses, trucks, vans, neighborhood electric vehicles, electric motorcycles and the like, primarily powered by an electric motor that draws current from a rechargeable storage battery, fuel cell, photovoltaic array or other source of electric current. Plug-in hybrid electric vehicles (PHEV) are considered electric vehicles. For purposes of the *California Electrical Code*, off-road, self-propelled electric vehicles, such as industrial trucks, hoists, lifts, transports, golf carts, airline ground support equipment, tractors, boats and the like, are not included.

**ELECTRIC VEHICLE (EV) CAPABLE SPACE.** [BSC-CG, DSA-SS and HCD] A vehicle space with electrical panel space and load capacity to support a branch circuit and necessary raceways, both underground and/or surface mounted, to support EV charging.

**ELECTRIC VEHICLE (EV) CHARGER.** [HCD] Off-board charging equipment used to charge an electric vehicle.

**ELECTRIC VEHICLE CHARGING SPACE (EV SPACE).** [HCD] A space intended for future installation of EV charging equipment and charging of electric vehicles.

**ELECTRIC VEHICLE CHARGING STATION (EVCS).** [HCD] One or more electric vehicle charging spaces served by electric vehicle charger(s) or other charging equipment allowing charging of electric vehicles. Electric vehicle charging stations are not considered parking spaces.

**ELECTRIC VEHICLE (EV) READY SPACE.** [HCD] A vehicle space which is provided with a branch circuit; any necessary raceways, both underground and/or surface mounted; to accommodate EV charging, terminating in a receptacle or a charger.

**ELECTRIC VEHICLE SUPPLY EQUIPMENT (EVSE).** [BSC-CG, DSA-SS and HCD] The conductors, including the ungrounded, grounded and equipment grounding conductors and the electric vehicle connectors, attachment plugs, and all other fittings, devices, power outlets or apparatus installed specifically for the purpose of transferring energy between the premises wiring and the electric vehicle.

**EMBODIED ENERGY.** The energy used for raw material extraction, transportation, manufacturing, assembly, installation and disposal during the life of a product, including the potential energy stored within the product.

**ENERGY BUDGET.** The sum of the annual TDV energy consumption for energy use components included in the performance compliance approach for the Standard Design Building, as established in the Alternative Calculation Method Reference Manual approved by the Energy Commission and calculated by Compliance Software certified by the Energy Commission.

**ENERGY COMMISSION.** The California State Energy Resources Conservation and Development Commission.

**ENERGY DESIGN RATING.** The sum of the annual TDV energy consumption for energy use components included in the performance compliance approach for the Standard Design Building (Energy Budget) and the annual time dependent valuation (TDV) energy consumption for lighting and components not regulated by Title 24, Part 6 (such as domestic appliances and consumer electronics) and accounting for the annual TDV energy offset by an on-site renewable energy system. The Design Rating is calculated by Compliance Software certified by the Energy Commission.

**ENERGY EQUIVALENT (NOISE) LEVEL ( $L_{eq}$ ).** The level of a steady noise which would have the same energy as the fluctuating noise level integrated over the time period of interest.

**ENFORCING AGENCY.** The designated department or agency as specified by statute or regulation.

**EUTROPHICATION.** The excessive growth of aquatic plants, especially algae, producing bacteria which consume nearly all of the oxygen required to sustain fauna and other flora.

**EVAPOTRANSPIRATION ADJUSTMENT FACTOR (ETAF).** [DSA-SS] An adjustment factor when applied to reference evapotranspiration that adjusts for plant factors and irrigation efficiency, which are two major influences on the amount of water that needs to be applied to the landscape.

**EXFILTRATION.** The uncontrolled outward air leakage from inside a building, including leakage through cracks and

## DEFINITIONS

interstices, around windows and doors, and through any other exterior partition or duct penetration.

**EXPRESSWAY.** An arterial highway for through traffic which may have partial control of access, but which may or may not be divided or have grade separations at intersections.

**FLOOR AREA RATIO.** Gross square footage of all structures on a site divided by gross square footage of the site.

**FOOTPRINT AREA. [DSA-SS]** The total area of the furthest exterior wall of the structure projected to natural grade, not including exterior areas such as stairs, covered walkways, patios and decks.

**FREEWAY.** A divided arterial highway with full control of access and with grade separations at intersections.

**FRENCH DRAIN.** A trench, hole or other depressed area loosely filled with rock, gravel, fragments of brick or similar pervious material used to collect or channel drainage or run-off water.

**GEOHERMAL.** Renewable energy generated by deep-earth water or steam.

**GLOBAL WARMING POTENTIAL (GWP).** The radiative forcing impact of one mass-based unit of a given greenhouse gas relative to an equivalent unit of carbon dioxide over a given period of time. Carbon dioxide is the reference compound with a GWP of one.

**GLOBAL WARMING POTENTIAL VALUE (GWP VALUE).** The 100-year GWP value published by the Intergovernmental Panel on Climate Change (IPCC) in either its Second Assessment Report (SAR) (IPCC, 1995); or its Fourth Assessment A-3 Report (AR4) (IPCC, 2007). The SAR GWP values are found in column “SAR (100-yr)” of Table 2.14.; the AR4 GWP values are found in column “100 yr” of Table 2.14.

**GRAYWATER.** Pursuant to *Health and Safety Code* Section 17922.12, “graywater” means untreated wastewater that has not been contaminated by any toilet discharge, has not been affected by infectious, contaminated or unhealthy bodily wastes, and does not present a threat from contamination by unhealthful processing, manufacturing or operating wastes. “Graywater” includes, but is not limited to, wastewater from bathtubs, showers, bathroom washbasins, clothes washing machines and laundry tubs, but does not include wastewater from kitchen sinks or dishwashers.

**Note:** For the purpose of applying the standards contained in this code, “Graywater,” as defined above, has the same meaning as “gray water,” “grey water,” and “greywater.”

**GREEN BUILDING.** A holistic approach to design, construction and demolition that minimizes the building’s impact on the environment, the occupants and the community.

**GREENFIELDS.** Sites that are not previously developed or graded and remain in a natural state, able to support agriculture, open space or habitat.

**Note:** Previously developed sites are those that previously contained buildings, roadways or parking lots or were graded or altered by direct human activities.

**GREYFIELD SITE.** Any site previously developed with at least 50 percent of the surface area covered with impervious material.

**HALON.** Any of a class of chemical compounds derived from hydrocarbons by replacing one or more hydrogen atoms with bromine atoms, and other hydrogen atoms with other halogen atoms (chlorine, fluorine, iodine).

### HAZARDOUS WASTE.

- (a) A waste, defined as a “hazardous waste” in accordance with Section 25117 of the *Health and Safety Code*, or a combination of wastes, which because of its quantity, concentration or physical, chemical or infectious characteristics may do either of the following:
  - (1) Cause, or significantly contribute to, an increase in mortality or an increase in serious irreversible, or incapacitating reversible, illness.
  - (2) Pose a substantial present or potential hazard to human health or environment when improperly treated, stored, transported or disposed of, or otherwise managed.
- (b) Unless expressly provided otherwise, “hazardous waste” includes extremely hazardous waste and acutely hazardous waste.

**HEAT ISLAND EFFECT.** “Heat island effect” and “urban heat islands” refer to measurable elevated temperatures in developed areas as compared to more rural surroundings. Temperatures in developed areas are affected by absorption of heat by hardscapes and radiation of heat into surrounding areas resulting in local climate changes. Heat islands are influenced by geographic location and by local weather patterns, with effects changing on a daily or seasonal basis.

**HIGH-GWP REFRIGERANT.** A compound used as a heat transfer fluid or gas that is: (A) a chlorofluorocarbon, a hydrochlorofluorocarbon, a hydrofluorocarbon, a perfluorocarbon, or any compound or blend of compounds, with a GWP value equal to or greater than 150, or (B) any ozone depleting substance as defined in Title 40 of the Code of Federal Regulations, Part 82, §82.3 (as amended March 10, 2009).

**HIGH-RISE RESIDENTIAL BUILDING.** For the purposes of *CALGreen*, any building that is of Occupancy Group R and is four stories or greater in height.

**HOT WATER RECIRCULATION SYSTEM.** A hot water distribution system that reduces the time needed to deliver hot water to fixtures that are distant from the water heater, boiler or other water heating equipment. The recirculation system is comprised of hot water supply and return piping with shutoff valves, balancing valves, circulating pumps and a method of controlling the circulating system.

**HOTEL OR MOTEL. (HCD-1)** Any building containing six or more guest rooms intended or designed to be used, or which are used, rented or hired out to be occupied or which are occupied for sleeping purposes by guests.

**HYDROCHLOROFLUOROCARBON (HCFC).** A class of compounds primarily used as refrigerants or foam expansion agents, consisting of only hydrogen, chlorine, fluorine and carbon.

**HYDROFLUOROCARBON (HFC).** A class of compounds primarily used as refrigerants or foam expansion agents, consisting of only hydrogen, fluorine and carbon.

**IESNA.** Illuminating Engineering Society of North America.

**INERT SOLIDS OR INERT WASTE.** A non-liquid solid waste including, but not limited to, soil and concrete, that does not contain hazardous waste or soluble pollutants at concentrations in excess of water-quality objectives established by a regional water board pursuant to Division 7 (commencing with Section 13000) of the *California Water Code* and does not contain significant quantities of decomposable solid waste.

**INFILL SITE.** A site in an urbanized area that meets criteria defined in *Public Resources Code* Section 21061.3.

**INFILTRATION.** An uncontrolled inward air leakage from outside a building or unconditioned space, including leakage through cracks and interstices, around windows and doors and through any other exterior or demising partition or pipe or duct penetration.

**INTERIOR BUILDING.** The inside of the weatherproofing system.

**JUNIOR ACCESSORY DWELLING UNIT. [HCD]** A unit that is no more than 500 square feet in size and contained entirely within an existing single-family structure. A junior accessory dwelling unit may include separate sanitation facilities, or may share sanitation facilities with the existing structure. (See Government Code Section 65852.22.)

**KITCHEN.** That portion in a residential dwelling unit that is a room or area used for cooking, food storage and preparation and washing dishes, including associated counter tops and cabinets, refrigerator, stove, ovens and floor area.

**LANDSCAPE WATER METER. [HCD]** An inline device installed at the irrigation supply point that measures the flow of water into the irrigation system and is connected to a totalizer to record water use.

**LEVEL 2 ELECTRIC VEHICLE SUPPLY EQUIPMENT (EVSE). [HCD]** The 208/240-volt 40-ampere branch circuit, and the electric vehicle charging connectors, attachment plugs and all other fittings, devices, power outlets or apparatus installed specifically for the purpose of transferring energy between the premises wiring and the electric vehicle.

**LIFE CYCLE ASSESSMENT (LCA).** A technique to evaluate the relevant energy and material consumed and environmental impacts associated with the entire life of a product, process, activity or service, including a whole building.

**LIFE CYCLE INVENTORY (LCI).** A process of quantifying energy and raw material requirements, atmospheric emissions, waterborne emissions, solid wastes and other releases for the entire life cycle of a product, process or activity, including a whole building.

**LONG RADIUS ELBOW.** Pipe fitting installed between two lengths of pipe or tubing to allow a change of direction, with a radius 1.5 times the pipe diameter.

**LOW-GWP REFRIGERANT.** A compound used as a heat transfer fluid or gas that: (A) has a GWP value less than 150, and (B) is not an ozone depleting substance as defined in

Title 40 of the Code of Federal Regulations, Part 82, §82.3 (as amended March 10, 2009).

**LOW IMPACT DEVELOPMENT (LID).** Control of stormwater at its source to mimic drainage services provided by an undisturbed site.

**LOW POWER LEVEL 2 ELECTRIC VEHICLE (EV) CHARGING RECEPTACLE. [HCD]** A 208/240-volt 20-ampere minimum branch circuit and a receptacle for use by an EV driver to charge their electric vehicle or hybrid electric vehicle.

**LOW-RISE RESIDENTIAL BUILDING.** For the purpose of *CALGreen*, any building that is of Occupancy Group R and is three stories or less.

**MAXIMUM INCREMENTAL REACTIVITY (MIR).** The maximum change in weight of ozone formed by adding a compound to the “Base Reactive Organic Gas (ROG) Mixture” per weight of compound added, expressed to hundredths of a gram (g O<sub>3</sub>/g ROC).

**Note:** MIR values for individual compounds and hydrocarbon solvents are specified in CCR, Title 17, Sections 94700 and 94701.

**MERV** Filter minimum efficiency reporting value.

**METERING FAUCET.** A self-closing faucet that dispenses a specific volume of water for each actuation cycle. The volume or cycle duration can be fixed or adjustable.

**MODEL WATER EFFICIENT LANDSCAPE ORDINANCE (MWELO) [BSC-CG & DSA-SS]** A California regulation commencing with Section 490 of Chapter 2.7, Division 2, Title 23, *California Code of Regulations*. The MWELO regulation establishes a structure for planning, designing, installing, maintaining and managing water efficient landscapes in new construction and rehabilitated projects.

**MODEL WATER EFFICIENT LANDSCAPE ORDINANCE (MWELO). [HCD]** The California model ordinance (California Code of Regulations, Title 23, Division 2, Chapter 2.7), regulating landscape design, installation and maintenance practices. Local agencies are required to adopt the updated MWELO, or adopt a local ordinance at least as effective as the MWELO.

**MOISTURE CONTENT.** The weight of the water in wood expressed in percentage of the weight of the oven-dry wood.

**MOUNTING HEIGHT (MH).** The height of the photometric center of a luminaire above grade level.

**MULTI-OCCUPANT SPACES.** Indoor spaces used for presentations and training, including classrooms and conference rooms.

**NEIGHBORHOOD ELECTRIC VEHICLE (NEV). [BSC-CG, DSA-SS]** A motor vehicle that meets the definition of “low-speed vehicle” either in Section 385.5 of the Vehicle Code or in 49 CFR 571.500 (as it existed on July 1, 2000), and is certified to zero-emission vehicle standards.

**NEWLY CONSTRUCTED (or NEW CONSTRUCTION).** A newly constructed building (or new construction) does not include additions, alterations or repairs.

## DEFINITIONS

**NO ADDED FORMALDEHYDE (NAF) BASED RESINS.** Resin formulated with no added formaldehyde as part of the resin cross linking structure for making hardwood plywood, particle board or medium density fiberboard. “No added formaldehyde resins” include, but are not limited to, resins made from soy, polyvinyl acetate or methylene diisocyanate. [BSC] See CCR, Title 17, Section 93120.1(a).

**NON-STORMWATER DISCHARGES.** Discharges that do not originate from precipitation events. Including, but not limited to, dewatering activities, washout area discharge, vehicle and equipment cleaning, street cleaning and irrigation runoff.

**NONWATER URINAL WITH DRAIN CLEANSING ACTION.** A nonwater urinal that conveys waste into the drainage system without the use of water for flushing and automatically performs a drain-cleansing action after a predetermined amount of time.

**OFF-STREET LOADING SPACES. [BSC-CG, DSA-SS]** An area, other than a public street, public way or other property (and exclusive of off-street parking spaces), permanently reserved or set aside for the loading or unloading of motor vehicles, including ways of ingress and egress and maneuvering areas. Whenever the term “loading space” is used, it shall, unless the context clearly requires otherwise, be construed as meaning off-street loading space. This excludes designated passenger loading/unloading.

**ORGANIC WASTE.** Food waste, green waste, landscape and pruning waste, nonhazardous wood waste and food-soiled paper waste that is mixed in with food waste.

**OUTDOOR AIR (Outside air).** Air taken from outdoors and not previously circulated in the building.

**OVE. [BSC-CG, DSA-SS]** Optimal Value Engineering, another term for advanced wood framing techniques.

**PERMEABLE PAVING.** Permeable paving materials and techniques which allow the movement of water around the paving material and allow precipitation to percolate through the paving surface to the soil below.

### PLANTS.

**Adaptive plants.** Adaptive plants are plants that grow well in a given habitat with minimal attention in the form of winter protection, pest protection, irrigation and fertilization once established.

**Note:** Adaptive plants are considered low in maintenance and are not invasive plants.

**Invasive plants.** Invasive plants are both indigenous and nonindigenous species with growth habits that are characteristically aggressive.

**Note:** Invasive plants typically have a high reproductive capacity and tendency to overrun the ecosystems they inhabit.

**Native plants.** Native plants are plants that have adapted to a given area and are not invasive.

**POSTCONSUMER CONTENT. [BSC-CG, DSA-SS]** Waste material generated by consumers after it is used and which would otherwise be discarded.

**POSTCONSUMER CONTENT. [HCD]** Any material which has been used by a consumer and then recycled for use in a new material or product.

**POTABLE WATER.** Water that is drinkable and meets the US Environmental Protection Agency (EPA) Drinking Water Standards. See definition in the *California Plumbing Code*, Part 5.

**POTABLE WATER. [HCD]** Water that is satisfactory for drinking, culinary and domestic purposes, and meets the US Environmental Protection Agency (EPA) Drinking Water Standards and the requirements of the Health Authority Having Jurisdiction.

**PRECONSUMER (or POSTINDUSTRIAL) [BSC-CG, DSA-SS]** Material diverted from the waste stream during one manufacturing process, including scraps, damaged goods and excess production, that is used in another manufacturing process.

**PRECONSUMER (OR POSTINDUSTRIAL) CONTENT. [HCD]** Material diverted from the waste stream during one manufacturing process, including scraps, damaged goods and excess production that is reclaimed and used in another manufacturing process. Excluded is reutilization of materials such as rework, regrind or scrap generated in a process and capable of being reclaimed within the same process that generated those wastes.

**PROCESS.** An activity or treatment that is not related to the space conditioning, lighting, service water heating or ventilating of a building as it relates to human occupancy.

**PROCESS SPACE.** A space that is thermostatically controlled to maintain a process environment temperature less than 55°F or to maintain a process environment temperature greater than 90°F for the whole space that the system serves, or that is a space with a space-conditioning system designed and controlled to be incapable of operating at temperatures above 55°F or incapable of operating at temperatures below 90°F at design conditions.

**PRODUCT-WEIGHTED MIR (PWMIR).** The sum of all weighted-MIR for all ingredients in a product subject to this article. The PWMIR is the total product reactivity expressed to hundredths of a gram of ozone formed per gram of product (excluding container and packaging).

**Note:** PWMIR is calculated according to equations found in CCR, Title 17, Section 94521(a).

**PROPORTIONAL RECYCLED CONTENT (PRCM).** The amount of recycled content of a material in an assembly as related to the percentage of the material in an assembly product. PRCM is derived by multiplying the percentage of each material in an assembly by the percentage of recycled content in the material.

**PSIG.** Pounds per square inch, gauge.

**RAINWATER.** Precipitation on any public or private parcel that has not entered an offsite storm drain system or channel, a flood control channel, or any other stream channel, and has not previously been put to beneficial use.

**RAINWATER CATCHMENT SYSTEM.** A facility designed to capture, retain and store rainwater flowing off a

building, parking lot, or any other manmade impervious surface for subsequent onsite use. Rainwater catchment system is also known as “Rainwater Harvesting System” or “Rainwater Capture System.”

**REACTIVE ORGANIC COMPOUND (ROC).** Any compound that has the potential, once emitted, to contribute to ozone formation in the troposphere.

**RECLAIMED (RECYCLED) WATER.** Nonpotable water that meets California State Water Resources Control Board statewide uniform criteria for disinfected tertiary recycled water. Reclaimed (recycled) water is also known as “recycled water” or “reclaimed water.”

**RECYCLE or RECYCLING.** The process of collecting, sorting, cleansing, treating and reconstituting materials that would otherwise become solid waste, and returning them to the economic mainstream in the form of raw material for new, reused or reconstituted products which meet the quality standards necessary to be used in the marketplace. “Recycling” does not include transformation, as defined in *Public Resources Code* Section 40201.

**RECYCLED CONTENT. [BSC-CG, DSA-SS]** Refer to International Organization for Standardization ISO 14021—Environmental labels and declarations—Self-declared environmental claims (Type II environmental labeling).

**RECYCLED CONTENT (RC). [HCD]** The amount of recycled material in an assembly product or material. Refer to International Organization for Standardization ISO 14021—Environmental labels and declarations—Self-declared environmental claims (Type II environmental labeling).

**RECYCLED CONTENT VALUE (RCV). [BSC-CG, DSA-SS]** Material cost multiplied by postconsumer content plus  $\frac{1}{2}$  the preconsumer content, or  $RCV = \$X (\text{postconsumer content} + \frac{1}{2} \text{preconsumer content})$ .

**RECYCLED CONTENT VALUE (RCV). [HCD]**

**Assembly products (RCVA).** Assembly product cost multiplied by the recycled content of the assembly based on all of the postconsumer content and 50 percent of the preconsumer content.

**Materials (RCVM).** Material cost multiplied by recycled content of the material based on all of the postconsumer content and 50 percent of the preconsumer content.

**RECYCLED WATER.** Water which, as a result of treatment of waste, is suitable for a direct beneficial use or a controlled use that would not otherwise occur [Water Code Section 13050 (n)]. Simply put, recycled water is water treated to remove waste matter, attaining a quality that is suitable to use the water again.

**RESIDENTIAL BUILDING.** See “LOW-RISE RESIDENTIAL BUILDING” or “HIGH-RISE RESIDENTIAL BUILDING.”

**RESILIENT FLOORING.** Refers to nontextile flooring materials which have a relatively firm surface, yet characteristically have “give” and “bounce back” to their original surface profile from the weight of objects that compress its

surface. Resilient flooring materials are made in various shapes and sizes including both tile and roll form. Common types of resilient flooring include but are not limited to:

1. Vinyl composition tile.
2. Vinyl tile and sheet flooring.
3. Linoleum tile and sheet.
4. Cork tile and sheet flooring.
5. Rubber tile and sheet flooring.
6. Polymeric poured seamless flooring.
7. Other types of non-textile synthetic flooring.

**RE-USE.** The use, in the same form as it was produced, of a material which might otherwise be discarded.

**SCHRADER ACCESS VALVES.** Access fittings with a valve core installed.

**SHORT RADIUS ELBOW.** Pipe fitting installed between two lengths of pipe or tubing to allow a change of direction, with a radius 1.0 times the pipe diameter.

**SINGLE OCCUPANT SPACES.** Private offices, workstations in open offices, reception workstations and ticket booths.

**SOLAR ACCESS.** The ratio of solar insolation including shade to the solar insolation without shade. Shading from obstructions located on the roof or any other part of the building shall not be included in determination of annual solar access.

**SOLAR REFLECTANCE.** A measure of the fraction of solar energy that is reflected by a surface (measured on a scale of zero to one).

**SOLAR REFLECTANCE INDEX (SRI).** A measure of a material surface’s ability to reflect solar heat, as shown by a small temperature rise. It includes both solar reflectance and thermal emittance and is quantified such that a standard black surface (solar reflectance 0.05, thermal emittance 0.90) is zero and a standard white surface (solar reflectance 0.80, thermal emittance 0.90) is 100.

**SOLID WASTE.**

- (a) All putrescible and nonputrescible solid, semisolid and liquid wastes, including garbage, trash, refuse, paper, rubbish, ashes, industrial wastes, demolition and construction wastes, abandoned vehicles and parts thereof, discarded home and industrial appliances, dewatered, treated or chemically fixed sewage sludge which is not hazardous waste, manure, vegetable or animal solid and semisolid wastes, and other discarded solid and semisolid wastes.
- (b) “Solid waste” does not include any of the following wastes:
  - (1) Hazardous waste, as defined in *Public Resources Code* Section 40141.
  - (2) Radioactive waste regulated pursuant to the Radiation Control Law (Chapter 8, commencing with

## DEFINITIONS

Section 114960, of Part 9 of Division 104 of the *Health and Safety Code*).

- (3) Medical waste regulated pursuant to the Medical Waste Management Act (Part 14 commencing with Section 117600) of Division 104 of the *Health and Safety Code*). Untreated medical waste shall not be disposed of in a solid waste landfill, as defined in *Public Resources Code* Section 40195.1. Medical waste that has been treated and deemed to be solid waste shall be regulated pursuant to this division.

**SPECIAL LANDSCAPE AREA (SLA).** [DSA-SS] An area of the landscape dedicated solely to edible plants, planting areas used for educational purposes, recreational areas, areas irrigated with recycled water, water features using recycled water, and where turf provides a playing surface or gathering space.

**STANDARD DISHWASHER.** A dishwasher that has a capacity equal to or greater than eight place settings plus six serving pieces as specified in ANSI/AHAM DW-1.

**SUBMETER.** [HCD 1] A secondary device beyond a meter that measures water consumption of an individual rental unit within a multiunit residential structure or mixed-use residential and commercial structure. (See Civil Code Section 1954.202(g) and Water Code Section 517 for additional details.)

**SUPERMARKET.** For the purposes of Section 5.508.2, a supermarket is any retail food facility with 8,000 square feet or more conditioned area, and that utilizes either refrigerated display cases, or walk-in coolers or freezers connected to remote compressor units or condensing units.

**TENANT-OCCUPANTS.** Building occupants who inhabit a building during its normal hours of operation as permanent occupants, such as employees, as distinguished from customers and other transient visitors.

**TEST.** A procedure to determine quantitative performance of a system or equipment.

**THERMAL EMITTANCE.** The relative ability of a surface to radiate absorbed heat (measured on a scale of 0 to 1).

**TIME DEPENDENT VALUATION (TDV) ENERGY.** The time varying energy caused to be used by the building to provide space conditioning and water heating and for specified buildings lighting. TDV energy accounts for the energy used at the building site and consumed in producing and in delivering energy to a site, including, but not limited to, power generation, transmission and distribution losses.

**ULTRA-LOW EMITTING FORMALDEHYDE (ULEF) RESINS.** Resins formulated such that average formaldehyde emissions are consistently below the Phase 2 emission standards in Section 93120.2, as provided in Section 93120.3(d) of Title 17, California Code of Regulations. [BSC] See CCR, Title 17, Section 93120.1(a).

**UNIVERSAL WASTE.** [BSC-CG, DSA-SS] The wastes listed below are subject to regulation pursuant to Chapter 23

of Title 22, *California Code of Regulations*, and shall be known as “universal wastes.”

- (1) Batteries, as described in Title 22 CCR, Section 66273.2, Subsection (a);
- (2) Electronic devices, as described in Title 22 CCR, Section 66273.3, Subsection (a);
- (3) Mercury-containing equipment, as described in Title 22 CCR, Section 66273.4, Subsection (a);
- (4) Lamps, as described in Title 22 CCR, Section 66273.5, Subsection (a);
- (5) Cathode ray tubes, as described in Title 22 CCR, Section 66273.6, Subsection (a);
- (6) Cathode ray tube glass, as described in Title 22 CCR, Section 66273.7, Subsection (a); and
- (7) Aerosol cans, as specified in Health and Safety Code, Section 25201.16.

**VANPOOL VEHICLE.** [BSC-CG and DSA-SS] Eligible vehicles are limited to any motor vehicle, other than a motor-truck or truck tractor, designed for carrying more than 10 but not more than 15 persons including the driver, which is maintained and used primarily for the nonprofit work-related transportation of adults for the purposes of ridesharing.

**Note:** Source: Vehicle Code, Division 1, Section 668.

**VAPOR BARRIER.** Material that has a permeance of one perm or less and that provides resistance to the transmission of water vapor.

**VEGETATED SPACE.** Vegetated spaces include, but are not limited to, native, undisturbed areas; rehabilitation of previously disturbed areas with landscaping; green belts; and recreation facilities that include landscaping, such as golf courses.

**VOC.** A volatile organic compound (VOC) broadly defined as a chemical compound based on carbon chains or rings with vapor pressures greater than 0.1 millimeters of mercury at room temperature. These compounds typically contain hydrogen and may contain oxygen, nitrogen and other elements. See CCR Title 17, Section 94508(a).

**Note:** Where specific regulations are cited from different agencies, such as South Coast Air Quality Management District (SCAQMD), California Air Resources Board (ARB or CARB), etc., the VOC definition included in that specific regulation is the one that prevails for the specific measure in question.

**WATTLES.** Wattles are used to reduce sediment in runoff. Wattles are often constructed of natural plant materials such as hay, straw or similar material shaped in the form of tubes and placed on a downflow slope. Wattles are also used for perimeter and inlet controls.

**ZEV.** [BSC-CG, DSA-SS] Any vehicle certified to zero-emission standards.

**ZERO-EMITTING AND HIGH EFFICIENT VEHICLES.** [BSC-CG, DSA-SS] Eligible vehicles are limited to the following:

1. Zero emission vehicle (ZEV), enhanced advanced technology PZEV (enhanced AT ZEV) or transitional zero

emission vehicles (TZEV) regulated under CCR, Title 13, Section 1962.

2. High-efficiency vehicles, regulated by US EPA, bearing a fuel economy and greenhouse gas rating of 9 or 10 as regulated under 40 CFR Section 600 Subpart D.



# CALIFORNIA GREEN BUILDING STANDARDS CODE – MATRIX ADOPTION TABLE

## CHAPTER 3 – GREEN BUILDING

(Matrix Adoption Tables are nonregulatory, intended only as an aid to the code user.  
See Chapter 1 for state agency authority and building applications.)

Adopting agency	BSC	BSC-CG	SFM	HCD			DSA		OSHDP						BSCC	DPH	AGR	DWR	CEC	CA	SL	SLC
				1	2	1/AC	AC	SS	1	1R	2	3	4	5								
Adopt entire CA chapter																						
Adopt entire chapter as amended (amended sections listed below)																						
Adopt only those sections that are listed below		X		X				X	X		X		X									
Chapter/Section																						
301		X		X					X				X									
301.1				X				X														
301.1.1				X																		
301.2				X																		
301.3		X																				
301.3.1		X																				
301.3.2		X																				
301.4								X														
301.5									X		X		X									
302		X		X				X	X		X		X									
303		X		X					X		X		X									
303.1		X																				
304		X		X					X		X		X									
305									X													
306								X														

## CHAPTER 3

## GREEN BUILDING

### SECTION 301 GENERAL

**301.1 Scope.** Buildings shall be designed to include the green building measures specified as mandatory in the application checklists contained in this code. Voluntary green building measures are also included in the application checklists and may be included in the design and construction of structures covered by this code, but are not required unless adopted by a city, county, or city and county as specified in Section 101.7.

**301.1.1 Additions and alterations. [HCD]** The mandatory provisions of Chapter 4 shall be applied to additions or alterations of existing residential buildings where the addition or alteration increases the building's conditioned area, volume or size. The requirements shall apply only to and/or within the specific area of the addition or alteration.

The mandatory provisions of Section 4.106.4.2 may apply to additions or alterations of existing parking facilities or the addition of new parking facilities serving exist-

ing multifamily buildings. See Section 4.106.4.3 for application.

**NOTE:** Repairs including, but not limited to, resurfacing, restriping, and repairing or maintaining existing lighting fixtures are not considered alterations for the purpose of this section.

### **301.2 Low-rise and high-rise residential buildings. [HCD]**

The provisions of individual sections of *CALGreen* may apply to either low-rise residential buildings, high-rise residential buildings, or both. Individual sections will be designated by banners to indicate where the section applies specifically to low-rise only (LR) or high-rise only (HR). When the section applies to both low-rise and high-rise buildings, no banner will be used.

### **301.3 Nonresidential additions and alterations. [BSC-CG]**

The provisions of individual sections of Chapter 5 apply to newly constructed buildings, building additions of 1,000 square feet or greater, and/or building alterations with a permit valuation of \$200,000 or above (for occupancies within

the authority of California Building Standards Commission). Code sections relevant to additions and alterations shall only apply to the portions of the building being added or altered within the scope of the permitted work.

A code section will be designated by a banner to indicate where the code section only applies to newly constructed buildings [N] or to additions and/or alterations [A]. When the code section applies to both, no banner will be used.

**301.3.1 Nonresidential additions and alterations that cause updates to plumbing fixtures only:**

**Note:** On and after January 1, 2014, certain commercial real property, as defined in Civil Code Section 1101.3, shall have its noncompliant plumbing fixtures replaced with appropriate water-conserving plumbing fixtures under specific circumstances. See Civil Code Section 1101.1 *et seq.* for definitions, types of commercial real property affected, effective dates, circumstances necessitating replacement of noncompliant plumbing fixtures, and duties and responsibilities for ensuring compliance.

**301.3.2 Waste diversion.** The requirements of Section 5.408 shall be required for additions and alterations whenever a permit is required for work.

**301.4 Mandatory measures for public schools and community colleges. [DSA-SS]** New building construction and site work on a new or existing site shall comply with Section 301.4.

**301.4.1** Building and site construction on a new site shall comply with Chapter 5 as adopted by DSA-SS.

**301.4.2** Work on an existing site shall comply with Section 301.4.2.

**301.4.2.1** Newly constructed site work shall comply with Chapter 5 as adopted by DSA-SS.

**301.4.2.2** Newly constructed buildings shall comply with Chapter 5 as adopted by DSA-SS and Section 301.4.3.

**301.4.2.3** Additions to existing buildings shall comply with Section 301.4.3.

**301.4.2.4** Rehabilitated landscape areas shall comply with Sections 5.304.6 and 5.106.12.

**301.4.3 Minimum rehabilitated landscape area requirement.** A minimum rehabilitated landscape area equal to 75 percent of the footprint area of the building shall comply with Section 5.304.6 and Section 5.106.12. New buildings or additions to existing buildings less than 1,600 square feet shall not be required to comply with Section 301.4.3.

**301.5 Health Facilities. [OSHDP 1, 2 & 4]** Health facilities under the jurisdiction of the Office of Statewide Health Planning and Development (OSHDP) are required to comply with the mandatory measures prescribed in Section 5.304, Outdoor Water Use. Compliance with Section 5.304, as adopted by the Building Standards Commission, is enforced by the local agency having jurisdiction. Evidence of local approval shall be submitted to OSHDP prior to issuance of plan approval or a building permit.

## SECTION 302 MIXED OCCUPANCY BUILDINGS

**302.1 Mixed occupancy buildings.** In mixed occupancy buildings, each portion of a building shall comply with the specific green building measures applicable to each specific occupancy.

**Exceptions:**

1. **[HCD]** Accessory structures and accessory occupancies serving residential buildings shall comply with Chapter 4 and Appendix A4, as applicable.
2. **[HCD]** For the purposes of *CALGreen*, live/work units, complying with Section 508.5 of the *California Building Code*, shall not be considered mixed occupancies. Live/work units shall comply with Chapter 4 and Appendix A4, as applicable.

## SECTION 303 PHASED PROJECTS

**303.1 Phased projects.** For shell buildings and others constructed for future tenant improvements, only those code measures relevant to the building components and systems considered to be new construction (or newly constructed) shall apply.

**303.1.1 Initial tenant improvements.** The provisions of this code shall apply only to the initial tenant improvements to a project. Subsequent tenant improvements shall comply with the scoping provisions in Section 301.3 nonresidential additions and alterations.

## SECTION 304 VOLUNTARY TIERS

**304.1 Purpose.** Voluntary tiers are intended to further encourage building practices that improve public health, safety and general welfare by promoting the use of building concepts which minimize the building's impact on the environment and promote a more sustainable design.

**304.1.1 Tiers.** The provisions of Divisions A4.6 and A5.6 outline means, in the form of voluntary tiers, for achieving enhanced construction levels by incorporating additional measures for residential and nonresidential new construction. Voluntary tiers may be adopted by local governments and, when adopted, enforced by local enforcing agencies. Buildings complying with tiers specified for each occupancy contain additional prerequisite and elective green building measures necessary to meet the threshold of each tier. See Section 101.7 of this code for procedures and requirements related to local amendments, additions or deletions, including changes to energy standards.

**[BSC & HCD]** Where there are practical difficulties involved in complying with the threshold levels of a tier, the enforcing agency may grant modifications for individual cases. The enforcing agency shall first find that a special individual reason makes the strict letter of the tier impractical and that modification is in conformance with the intent and purpose of the measure. The details of any action granting modification shall be recorded and entered in the files of the enforcing agency.

- b. There is no requirement for EV spaces to be constructed or available until receptacles for EV charging or EV chargers are installed for use.

2. **EV Ready.** Twenty-five (25) percent of the total number of parking spaces shall be equipped with low power Level 2 EV charging receptacles. For multifamily parking facilities, no more than one receptacle is required per dwelling unit when more than one parking space is provided for use by a single dwelling unit.

**Exception:** Areas of parking facilities served by parking lifts.

**4.106.4.2.2 Multifamily development projects with 20 or more dwelling units, hotels and motels with 20 or more sleeping units or guest rooms.** The number of dwelling units, sleeping units or guest rooms shall be based on all buildings on a project site subject to this section.

1. **EV Capable.** Ten (10) percent of the total number of parking spaces on a building site, provided for all types of parking facilities, shall be electric vehicle charging spaces (EV spaces) capable of supporting future Level 2 EVSE. Electrical load calculations shall demonstrate that the electrical panel service capacity and electrical system, including any on-site distribution transformer(s), have sufficient capacity to simultaneously charge all EVs at all required EV spaces at a minimum of 40 amperes.

The service panel or subpanel circuit directory shall identify the overcurrent protective device space(s) reserved for future EV charging purposes as “EV CAPABLE” in accordance with the *California Electrical Code*.

**Exception:** When EV chargers (Level 2 EVSE) are installed in a number greater than five (5) percent of parking spaces required by Section 4.106.4.2.2, Item 3, the number of EV capable spaces required may be reduced by a number equal to the number of EV chargers installed over the five (5) percent required.

**Notes:**

- a. Construction documents shall show locations of future EV spaces.
  - b. There is no requirement for EV spaces to be constructed or available until receptacles for EV charging or EV chargers are installed for use.
2. **EV Ready.** Twenty-five (25) percent of the total number of parking spaces shall be equipped with low power Level 2 EV charging receptacles. For multifamily parking facilities, no more than one receptacle is required per dwelling unit when

more than one parking space is provided for use by a single dwelling unit.

**Exception:** Areas of parking facilities served by parking lifts.

3. **EV Chargers.** Five (5) percent of the total number of parking spaces shall be equipped with Level 2 EVSE. Where common use parking is provided, at least one EV charger shall be located in the common use parking area and shall be available for use by all residents or guests.

When low power Level 2 EV charging receptacles or Level 2 EVSE are installed beyond the minimum required, an automatic load management system (ALMS) may be used to reduce the maximum required electrical capacity to each space served by the ALMS. The electrical system and any on-site distribution transformers shall have sufficient capacity to deliver at least 3.3 kW simultaneously to each EV charging station (EVCS) served by the ALMS. The branch circuit shall have a minimum capacity of 40 amperes, and installed EVSE shall have a capacity of not less than 30 amperes. ALMS shall not be used to reduce the minimum required electrical capacity to the required EV capable spaces.

**4.106.4.2.2.1 Electric vehicle charging stations (EVCS).** Electric vehicle charging stations required by Section 4.106.4.2.2.1.2, Item 3, shall comply with Section 4.106.4.2.2.1.1.

**Exception:** Electric vehicle charging stations serving public accommodations, public housing, motels, and hotels shall not be required to comply with this section. See *California Building Code*, Chapter 11B, for applicable requirements.

**4.106.4.2.2.1.1 Location.** EVCS shall comply with at least one of the following options:

1. The charging space shall be located adjacent to an accessible parking space meeting the requirements of the *California Building Code*, Chapter 11A, to allow use of the EV charger from the accessible parking space.
2. The charging space shall be located on an accessible route, as defined in the *California Building Code*, Chapter 2, to the building.

**Exception:** Electric vehicle charging stations designed and constructed in compliance with the *California Building Code*, Chapter 11B, are not required to comply with Section 4.106.4.2.2.1.1 and Section 4.106.4.2.2.1.2, Item 3.

**4.106.4.2.2.1.2 Electric vehicle charging stations (EVCS) dimensions.** The charging spaces shall be designed to comply with the following:

1. The minimum length of each EV space shall be 18 feet (5486 mm).

2. The minimum width of each EV space shall be 9 feet (2743 mm).
3. One in every 25 charging spaces, but not less than one, shall also have an 8-foot (2438 mm) wide minimum aisle. A 5-foot (1524 mm) wide minimum aisle shall be permitted provided the minimum width of the EV space is 12 feet (3658 mm).
  - a. Surface slope for this EV space and the aisle shall not exceed 1 unit vertical in 48 units horizontal (2.083 percent slope) in any direction.

**4.106.4.2.2.1.3 Accessible EV spaces.** In addition to the requirements in Sections 4.106.4.2.2.1.1 and 4.106.4.2.2.1.2, all EVSE, when installed, shall comply with the accessibility provisions for EV chargers in the *California Building Code*, Chapter 11B. EV ready spaces and EVCS in multifamily developments shall comply with *California Building Code*, Chapter 11A, Section 1109A.

#### 4.106.4.2.3 EV space requirements.

1. **Single EV space required.** Install a listed raceway capable of accommodating a 208/240-volt dedicated branch circuit. The raceway shall not be less than trade size 1 (nominal 1-inch inside diameter). The raceway shall originate at the main service or subpanel and shall terminate into a listed cabinet, box or enclosure in close proximity to the location or the proposed location of the EV space. Construction documents shall identify the raceway termination point, receptacle or charger location, as applicable. The service panel and/or subpanel shall have a 40-ampere minimum dedicated branch circuit, including branch circuit overcurrent protective device installed, or space(s) reserved to permit installation of a branch circuit overcurrent protective device.

**Exception:** A raceway is not required if a minimum 40-ampere 208/240-volt dedicated EV branch circuit is installed in close proximity to the location or the proposed location of the EV space, at the time of original construction in accordance with the *California Electrical Code*.

2. **Multiple EV spaces required.** Construction documents shall indicate the raceway termination point and the location of installed or future EV spaces, receptacles or EV chargers. Construction documents shall also provide information on amperage of installed or future receptacles or EVSE, raceway method(s), wiring schematics and electrical load calculations. Plan design shall be based upon a 40-ampere minimum branch circuit. Required raceways and related components

that are planned to be installed underground, enclosed, inaccessible or in concealed areas and spaces shall be installed at the time of original construction.

**Exception:** A raceway is not required if a minimum 40-ampere 208/240-volt dedicated EV branch circuit is installed in close proximity to the location or the proposed location of the EV space at the time of original construction in accordance with the *California Electrical Code*.

**4.106.4.2.4 Identification.** The service panel or sub-panel circuit directory shall identify the overcurrent protective device space(s) reserved for future EV charging purposes as “EV CAPABLE” in accordance with the *California Electrical Code*.

**4.106.4.2.5 Electric vehicle ready space signage.** | | Electric vehicle ready spaces shall be identified by signage or pavement markings, in compliance with Caltrans Traffic Operations Policy Directive 13-01 (Zero Emission Vehicle Signs and Pavement Markings) or its successor(s).

**4.106.4.3 Electric vehicle charging for additions and alterations of parking facilities serving existing multifamily buildings.** When new parking facilities are added, or electrical systems or lighting of existing parking facilities are added or altered and the work requires a building permit, ten (10) percent of the total number of parking spaces added or altered shall be electric vehicle charging spaces (EV spaces) capable of supporting future Level 2 EVSE.

#### Notes:

1. Construction documents are intended to demonstrate the project’s capability and capacity for facilitating future EV charging.
2. There is no requirement for EV spaces to be constructed or available until EV chargers are installed for use.

# CALIFORNIA GREEN BUILDING STANDARDS CODE – MATRIX ADOPTION TABLE

## CHAPTER 5 – NONRESIDENTIAL MANDATORY MEASURES

### DIVISION 5.1 – PLANNING AND DESIGN

(Matrix Adoption Tables are nonregulatory, intended only as an aid to the code user.  
See Chapter 1 for state agency authority and building applications.)

Adopting agency	BSC	BSC-CG	SFM	HCD			DSA		OSHPD						BSCC	DPH	AGR	DWR	CEC	CA	SL	SLC
				1	2	1/AC	AC	SS	1	1R	2	3	4	5								
Adopt entire CA chapter		X																				
Adopt entire chapter as amended (amended sections listed below)																						
Adopt only those sections that are listed below								X														
Chapter/Section																						
5.101								X														
5.102 Definitions								X														
5.106.4.2 and subsections		†						X														
5.106.5.3 and subsections								X														
5.106.5.4 and subsections								†														
5.106.8								X														
5.106.10								X														
5.106.12 and subsections		†						X														

The state agency does not adopt sections identified with the following symbol: †

## CHAPTER 5

# NONRESIDENTIAL MANDATORY MEASURES

### *Division 5.1 – PLANNING AND DESIGN*

#### SECTION 5.101 GENERAL

**5.101.1 Scope.** The provisions of this chapter outline planning, design and development methods that include environmentally responsible site selection, building design, building siting and development to protect, restore and enhance the environmental quality of the site and respect the integrity of adjacent properties.

#### SECTION 5.102 DEFINITIONS

**5.102.1 Definitions.** The following terms are defined in Chapter 2.

**CUTOFF LUMINAIRES.**

**TENANT-OCCUPANTS.**

**ZEV.**

#### SECTION 5.103 SITE SELECTION (Reserved)

#### SECTION 5.104 SITE PRESERVATION (Reserved)

#### SECTION 5.105 DECONSTRUCTION AND REUSE OF EXISTING STRUCTURES (Reserved)

#### SECTION 5.106 SITE DEVELOPMENT

**5.106.1 Stormwater pollution prevention for projects that disturb less than one acre of land.** Newly constructed projects and additions which disturb less than one acre of land and are not part of a larger common plan of development or sale shall prevent the pollution of stormwater runoff from the construction activities through one or more of the following measures:

**5.106.1.1 Local ordinance.** Comply with a lawfully enacted stormwater management and/or erosion control ordinance.

**5.106.1.2 Best management practices (BMP's).** Prevent the loss of soil through wind or water erosion by implementing an effective combination of erosion and sediment control and good housekeeping BMP's.

1. Soil loss BMP's that should be considered for implementation as appropriate for each project include, but are not limited to, the following:
  - a. Scheduling construction activity during dry weather, when possible.
  - b. Preservation of natural features, vegetation, soil and buffers around surface waters.
  - c. Drainage swales or lined ditches to control stormwater flow.
  - d. Mulching or hydroseeding to stabilize disturbed soils.
  - e. Erosion control to protect slopes.
  - f. Protection of storm drain inlets (gravel bags or catch basin inserts).
  - g. Perimeter sediment control (perimeter silt fence, fiber rolls).
  - h. Sediment trap or sediment basin to retain sediment on site.
  - i. Stabilized construction exits.
  - j. Wind erosion control.
  - k. Other soil loss BMP's acceptable to the enforcing agency.
2. Good housekeeping BMP's to manage construction equipment, materials, non-stormwater discharges and wastes that should be considered for implementation as appropriate for each project include, but are not limited to, the following:
  - a. Dewatering activities.
  - b. Material handling and waste management.
  - c. Building materials stockpile management.
  - d. Management of washout areas (concrete, paints, stucco, etc.).
  - e. Control of vehicle/equipment fueling to contractor's staging area.
  - f. Vehicle and equipment cleaning performed off site.
  - g. Spill prevention and control.
  - h. Other housekeeping BMP's acceptable to the enforcing agency.

**5.106.2 Stormwater pollution prevention for projects that disturb one or more acres of land.** Comply with all lawfully enacted stormwater discharge regulations for projects that (1) disturb one acre or more of land, or (2) disturb less than one acre of land but are part of a larger common plan of development or sale.

**Note:** Projects that (1) disturb one acre or more of land, or (2) disturb less than one acre of land but are part of a

larger common plan of development or sale must comply with the postconstruction requirements detailed in the applicable National Pollutant Discharge Elimination System (NPDES) General Permit for Stormwater Discharges Associated with Construction and Land Disturbance Activities issued by the State Water Resources Control Board or the Lahontan Regional Water Quality Control Board (for projects in the Lake Tahoe Hydrologic Unit).

The NPDES permits require postconstruction runoff (post-project hydrology) to match the preconstruction runoff (pre-project hydrology) with the installation of postconstruction stormwater management measures. The NPDES permits emphasize runoff reduction through on-site stormwater use, interception, evapotranspiration and infiltration through non-structural controls, such as Low Impact Development (LID) practices and conservation design measures. Stormwater volume that cannot be addressed using nonstructural practices is required to be captured in structural practices and be approved by the enforcing agency.

Refer to the current applicable permits on the State Water Resources Control Board website at: [www.waterboards.ca.gov/constructionstormwater](http://www.waterboards.ca.gov/constructionstormwater). Consideration to the stormwater runoff management measures should be given during the initial design process for appropriate integration into site development.

**5.106.4 Bicycle parking.** For buildings within the authority of California Building Standards Commission as specified in Section 103, comply with Section 5.106.4.1. For buildings within the authority of the Division of the State Architect pursuant to Section 105, comply with Section 5.106.4.2.

**5.106.4.1 Bicycle parking. [BSC-CG]** Comply with Sections 5.106.4.1.1 and 5.106.4.1.2; or meet the applicable local ordinance, whichever is stricter.

**5.106.4.1.1 Short-term bicycle parking.** If the new project or an addition or alteration is anticipated to generate visitor traffic, provide permanently anchored bicycle racks within 200 feet of the visitors' entrance, readily visible to passers-by, for 5 percent of new visitor motorized vehicle parking spaces being added, with a minimum of one two-bike capacity rack.

**Exception:** Additions or alterations which add nine or less visitor vehicular parking spaces.

**5.106.4.1.2 Long-term bicycle parking.** For new buildings with tenant spaces that have 10 or more tenant-occupants, provide secure bicycle parking for 5 percent of the tenant-occupant vehicular parking spaces with a minimum of one bicycle parking facility.

**5.106.4.1.3.** For additions or alterations that add 10 or more tenant-occupant vehicular parking spaces, provide secure bicycle parking for 5 percent of the tenant vehicular parking spaces being added, with a minimum of one bicycle parking facility.

**5.106.4.1.4.** For new shell buildings in phased projects provide secure bicycle parking for 5 percent of the anticipated tenant-occupant vehicular parking spaces with a minimum of one bicycle parking facility.

**5.106.4.1.5.** Acceptable bicycle parking facility for Sections 5.106.4.1.2, 5.106.4.1.3 and 5.106.4.1.4 shall

# CALIFORNIA GREEN BUILDING STANDARDS CODE – MATRIX ADOPTION TABLE

## CHAPTER 5 – NONRESIDENTIAL MANDATORY MEASURES

### DIVISION 5.3 – WATER EFFICIENCY AND CONSERVATION

(Matrix Adoption Tables are nonregulatory, intended only as an aid to the code user.  
See Chapter 1 for state agency authority and building applications.)

Adopting agency	BSC	BSC-CG	SFM	HCD			DSA		OSHDP						BSCC	DPH	AGR	DWR	CEC	CA	SL	SLC
				1	2	1/AC	AC	SS	1	1R	2	3	4	5								
Adopt entire CA chapter		X																				
Adopt entire chapter as amended (amended sections listed below)																						
Adopt only those sections that are listed below								X														
Chapter/Section																						
5.301.1								X														
5.302.1 Definitions								X														
5.303.3.1								X														
5.303.3.2								X														
5.303.3.3								X														
5.303.3.4								X														
5.303.6								X														
5.304.6 and subsections		†						X														

The state agency does not adopt sections identified by the following symbol: †.

## CHAPTER 5

# NONRESIDENTIAL MANDATORY MEASURES

### *Division 5.3 – WATER EFFICIENCY AND CONSERVATION*

#### SECTION 5.301 GENERAL

**5.301.1 Scope.** The provisions of this chapter shall establish the means of conserving water used indoors, outdoors and in waste-water conveyance.

#### SECTION 5.302 DEFINITIONS

**5.302.1 Definitions.** The following terms are defined in Chapter 2.

**EVAPOTRANSPIRATION ADJUSTMENT FACTOR (ETAF).**

**GRAYWATER.**

**METERING FAUCET.**

**MODEL WATER EFFICIENT LANDSCAPE ORDINANCE (MWELO).**

**POTABLE WATER.**

**SPECIAL LANDSCAPE AREA (SLA). [DSA-SS]**

**SUBMETER.**

### SECTION 5.303 INDOOR WATER USE

**5.303.1 Meters.** Separate submeters or metering devices shall be installed for the uses described in Sections 5.303.1.1 and 5.303.1.2.

**5.303.1.1 New buildings or additions in excess of 50,000 square feet.** Separate submeters shall be installed as follows:

1. For each individual leased, rented or other tenant space within the building projected to consume more than 100 gal/day (380 L/day), including, but not limited to, spaces used for laundry or cleaners, restaurant or food service, medical or dental office, laboratory, or beauty salon or barber shop.
2. Where separate submeters for individual building tenants are unfeasible, for water supplied to the following subsystems:
  - a. Makeup water for cooling towers where flow through is greater than 500 gpm (30 L/s).
  - b. Makeup water for evaporative coolers greater than 6 gpm (0.04 L/s).

- c. Steam and hot-water boilers with energy input more than 500,000 Btu/h (147 kW).

**5.303.1.2 Excess consumption.** A separate submeter or metering device shall be provided for any tenant within a new building or within an addition that is projected to consume more than 1,000 gal/day.

**5.303.2 Reserved.**

**5.303.3 Water conserving plumbing fixtures and fittings.** Plumbing fixtures (water closets and urinals) and fittings (faucets and showerheads) shall comply with the following:

**5.303.3.1 Water closets.** The effective flush volume of all water closets shall not exceed 1.28 gallons per flush. Tank-type water closets shall be certified to the performance criteria of the US EPA WaterSense Specification for Tank-Type Toilets.

**Note:** The effective flush volume of dual flush toilets is defined as the composite, average flush volume of two reduced flushes and one full flush.

**5.303.3.2 Urinals.**

**5.303.3.2.1 Wall-mounted urinals.** The effective flush volume of wall-mounted urinals shall not exceed 0.125 gallons per flush.

**5.303.3.2.2 Floor-mounted urinals.** The effective flush volume of floor-mounted or other urinals shall not exceed 0.5 gallons per flush.

**5.303.3.3 Showerheads.**

**5.303.3.3.1 Single showerhead.** Showerheads shall have a maximum flow rate of not more than 1.8 gallons per minute at 80 psi. Showerheads shall be certified to the performance criteria of the US EPA WaterSense Specification for Showerheads.

**5.303.3.3.2 Multiple showerheads serving one shower.** When a shower is served by more than one showerhead, the combined flow rate of all showerheads and/or other shower outlets controlled by a single valve shall not exceed 1.8 gallons per minute at 80 psi, or the shower shall be designed to allow only one shower outlet to be in operation at a time.

**Note:** A hand-held shower shall be considered a showerhead.

**5.303.3.4 Faucets and fountains.**

**5.303.3.4.1 Nonresidential lavatory faucets.** Lavatory faucets shall have a maximum flow rate of not more than 0.5 gallons per minute at 60 psi.

**5.303.3.4.2 Kitchen faucets.** Kitchen faucets shall have a maximum flow rate of not more than 1.8 gallons per minute at 60 psi. Kitchen faucets may temporarily increase the flow above the maximum rate, but not to exceed 2.2 gallons per minute at 60 psi, and must default to a maximum flow rate of 1.8 gallons per minute at 60 psi.

**5.303.3.4.3 Wash fountains.** Wash fountains shall have a maximum flow rate of not more than 1.8 gallons per minute/20 [rim space (inches) at 60 psi].

**5.303.3.4.4 Metering faucets.** Metering faucets shall not deliver more than 0.20 gallons per cycle.

**5.303.3.4.5 Metering faucets for wash fountains.** Metering faucets for wash fountains shall have a maximum flow rate of not more than 0.20 gallons per cycle/20 [rim space (inches) at 60 psi].

**Note:** Where complying faucets are unavailable, aerators or other means may be used to achieve reduction.

**5.303.3.4.6 Pre-rinse spray valve.** When installed, shall meet the requirements in the *California Code of Regulations*, Title 20 (Appliance Efficiency Regulations), Section 1605.1(h)(4) Table H-2, Section 1605.3(h)(4)(A), and Section 1607(d)(7), and shall be equipped with an integral automatic shutoff.

**FOR REFERENCE ONLY:** The following table and code section have been reprinted from the *California Code of Regulations*, Title 20 (Appliance Efficiency Regulations), Section 1605.1(h)(4) and Section 1605.3(h)(4)(A).

**TABLE H-2  
STANDARDS FOR COMMERCIAL PRE-RINSE SPRAY VALVES  
MANUFACTURED ON OR AFTER JANUARY 28, 2019**

PRODUCT CLASS [spray force in ounce force (ozf)]	MAXIMUM FLOW RATE (gpm)
Product Class 1 ( $\leq 5.0$ ozf)	1.00
Product Class 2 ( $> 5.0$ ozf and $\leq 8.0$ ozf)	1.20
Product Class 3 ( $> 8.0$ ozf)	1.28

Title 20 Section 1605.3(h)(4)(A): Commercial pre-rinse spray valves manufactured on or after January 1, 2006, shall have a minimum spray force of not less than 4.0 ounces-force (ozf) [113 grams-force (gf)].

**5.303.4 Commercial kitchen equipment.**

**5.303.4.1 Food waste disposers.** Disposers shall either modulate the use of water to no more than 1 gpm when the disposer is not in use (not actively grinding food waste/no-load) or shall automatically shut off after no more than 10 minutes of inactivity. Disposers shall use no more than 8 gpm of water.

**Note:** This code section does not affect local jurisdiction authority to prohibit or require disposer installation.

**5.303.5 Areas of addition or alteration.** For those occupancies within the authority of the California Building Standards Commission as specified in Section 103, the provisions of Sections 5.303.3 and 5.303.4 shall apply to new fixtures in additions or areas of alteration to the building.

**5.303.6 Standards for plumbing fixtures and fittings.** Plumbing fixtures and fittings shall be installed in accordance with the *California Plumbing Code*, and shall meet the applicable standards referenced in Table 1701.1 of the *California Plumbing Code* and in Chapter 6 of this code.

**SECTION A4.602**  
**RESIDENTIAL OCCUPANCIES APPLICATION CHECKLIST—continued**

FEATURE OR MEASURE	LEVELS APPLICANT TO SELECT ELECTIVE MEASURES			VERIFICATIONS ENFORCING AGENCY TO SPECIFY VERIFICATION METHOD		
	Mandatory	Prerequisites and electives <sup>1</sup>		Enforcing Agency  <input type="checkbox"/> All	Installer or Designer  <input type="checkbox"/> All	Third party  <input type="checkbox"/> All
		Tier 1	Tier 2			
<b>A4.106.6</b> Install a vegetated roof for at least 50 percent of the roof area. Vegetated roofs shall comply with requirements for roof gardens and landscaped roofs in the <i>California Building Code</i> , Chapters 15 and 16.		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>A4.106.7</b> Reduce nonroof heat islands for 50 percent of sidewalks, patios, driveways or other paved areas by using one or more of the methods listed.		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>A4.106.8.1 Tier 1 and Tier 2</b> for one- and two-family dwellings and townhouses with attached private garages. Install a dedicated 208/240-volt branch circuit, including an overcurrent protective device rated at 40 amperes minimum per dwelling unit.		<input checked="" type="checkbox"/> <sup>2</sup>	<input checked="" type="checkbox"/> <sup>2</sup>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>A4.106.8.2.1</b> Provide capability for future electric vehicle charging in new multifamily dwellings, hotels and motels, as specified. <b>Tier 1.</b> 35 percent of the total number of parking spaces shall be electric vehicle (EV ready) with low power Level 2 EV charging receptacles. For projects with 20 or more dwelling units, sleeping units or guest rooms, 10 percent of the total number of parking spaces shall be equipped with Level 2 EVSE. <b>Tier 2.</b> 40 percent of the total number of parking spaces shall be electric vehicle (EV ready) with low power Level 2 EV charging receptacles. For projects with 20 or more dwelling units, sleeping units or guest rooms, 15 percent of the total number of parking spaces shall be equipped with Level 2 EVSE.		<input checked="" type="checkbox"/> <sup>2</sup>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input checked="" type="checkbox"/> <sup>2</sup>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>A4.106.9</b> Provide bicycle parking facilities as noted below or meet a local ordinance, whichever is more stringent. Number of bicycle parking spaces may be reduced, as approved by the enforcing agency, due to building site characteristics, including but not limited to, isolation from other development. 1. Provide short-term bicycle parking, per Section A4.106.9.1. 2. Provide long-term bicycle parking for multifamily buildings, per Section A4.106.9.2. 3. Provide long-term bicycle parking for hotel and motel buildings, per Section A4.106.9.3.		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

*continued*

11

**SECTION A4.602**  
**RESIDENTIAL OCCUPANCIES APPLICATION CHECKLIST—continued**

FEATURE OR MEASURE	LEVELS APPLICANT TO SELECT ELECTIVE MEASURES			VERIFICATIONS ENFORCING AGENCY TO SPECIFY VERIFICATION METHOD		
		Prerequisites and electives <sup>1</sup>		Enforcing Agency  <input type="checkbox"/> All	Installer or Designer  <input type="checkbox"/> All	Third party  <input type="checkbox"/> All
		Mandatory	Tier 1	Tier 2		
<b>Innovative Concepts and Local Environmental Conditions</b>						
<b>A4.108.1</b> Items in this section are necessary to address innovative concepts or local environmental conditions.						
Item 1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Item 2	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Item 3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>ENERGY EFFICIENCY</b>						
<b>General</b>						
<b>4.201.1</b> Building meets or exceeds the requirements of the <i>California Building Energy Efficiency Standards</i> <sup>3</sup> .	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> <sup>2</sup>	<input checked="" type="checkbox"/> <sup>2</sup>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>Performance Approach for Newly Constructed Buildings</b>						
<b>A4.203.1.1 Hourly Source Energy Rating (EDR1).</b> EDR1 ratings for building design shall be computed by Energy Compliant software and shall reduce the EDR1 required by the software by the compliance margins specified in Table A4.203.1.1.		<input checked="" type="checkbox"/> <sup>2</sup>	<input checked="" type="checkbox"/> <sup>2</sup>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>A4.203.1.2 Prerequisite options.</b> In addition, a minimum of two of the efficiency measures specified in Sections A4.203.1.2.1 through A4.203.1.2.8 will be required to be met. <ul style="list-style-type: none"> <li>• Roof Deck Insulation or Ducts in Conditioned Space.</li> <li>• High-performance Walls.</li> <li>• Compact Hot Water Distribution System.</li> <li>• Drain Water Heat Recovery.</li> <li>• High Performance Vertical Fenestration.</li> <li>• Heat Pump Water Heater Demand Management.</li> <li>• Battery Storage System Controls.</li> <li>• Heat Pump Space and Water Heating.</li> </ul>		<input checked="" type="checkbox"/> <sup>2</sup>	<input checked="" type="checkbox"/> <sup>2</sup>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>A4.203.1.3 Consultation with local electric service provider.</b> Local jurisdictions considering adoption of reduced EDR targets based on using solar photovoltaic (PV) systems larger than required by the <i>California Energy Code</i> shall consult with the local electric service provider to ensure that that PV system sizing required to comply with the EDR targets will be acceptable to the local electric service provider.		<input checked="" type="checkbox"/> <sup>2</sup>	<input checked="" type="checkbox"/> <sup>2</sup>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

continued

# CALIFORNIA GREEN BUILDING STANDARDS CODE – MATRIX ADOPTION TABLE

## APPENDIX A5 – NONRESIDENTIAL VOLUNTARY MEASURES

### DIVISION A5.1 – PLANNING AND DESIGN

(Matrix Adoption Tables are nonregulatory, intended only as an aid to the code user.  
See Chapter 1 for state agency authority and building applications.)

Adopting agency	BSC	BSC-CG	SFM	HCD			DSA		OSHPD						BSCC	DPH	AGR	DWR	CEC	CA	SL	SLC
				1	2	1/AC	AC	SS	1	1R	2	3	4	5								
Adopt entire CA chapter		X																				
Adopt entire chapter as amended (amended sections listed below)																						
Adopt only those sections that are listed below																						
Chapter/Section																						

## APPENDIX A5

# NONRESIDENTIAL VOLUNTARY MEASURES

The measures contained in this appendix are not mandatory unless adopted by a city, county, or city and county as specified in Section 101.7 and provide additional measures that designers, builders and property owners may wish to consider during the planning, design and construction process.

### Division A5.1 – PLANNING AND DESIGN

#### PREFACE

Given that land use and planning are largely regulated locally, cities, counties and cities and counties should consider reducing greenhouse gas emissions associated with development through local land-use practices in conjunction with enforcing the provisions of this code. Specific land use strategies a city, county or city and county may wish to consider include but are not limited to the following:

**Site selection.** Develop sites for buildings, hardscape, roads or parking areas consistent with the local general plan and regional transportation plan pursuant to SB 375 (Stats. 2008, Ch. 728).

**Regional sustainable communities strategy.** Site selection and building design and use shall conform the project with the prevailing regional sustainable communities strategy or alternative planning strategy, whichever meets the greenhouse gas target established by the California Air Resources Board pursuant to SB375 (Stats. 2008, Ch. 728), including the general location of uses, residential densities and building intensities.

**Transit priority projects.** To qualify as a transit priority project, the project shall meet three criteria:

- (1) (a) contain at least 50 percent residential use, based on total building square footage and, if the project contains between 26 and 50 percent nonresidential uses, a floor area ratio of not less than 0.75; (b) provide a minimum net density of at least 20 dwelling units per acre; and (c) be within one-half mile of a major transit stop or high-quality

transit corridor included in a regional transportation plan as described in Section 21155 of Stats. 2008, Ch. 728;

(2) be consistent with the prevailing sustainable communities strategy or alternative planning strategy, whichever meets the greenhouse gas target established by the California Air Resources Board, including the general location of uses, residential densities and building intensities; and

(3) have all necessary entitlements required by the applicable local government.

**Note:** For additional information, see Government Code Sections 65080, 65080.1 and 65400 and Public Resources Code Sections 21061.3 and 21155.

#### SECTION A5.101 GENERAL

**A5.101.1 Scope.** The provisions of this chapter outline planning, design and development methods that include environmentally responsible site selection, building design, building siting and development to protect, restore and enhance the environmental quality of the site and respect the integrity of adjacent properties.

#### SECTION A5.102 DEFINITIONS

**A5.102.1 Definitions.** The following terms are defined in Chapter 2.

**BIORETENTION.**

**BROWNFIELD SITE.**

**CAV.**

DEVELOPMENT FOOTPRINT.  
 FLOOR AREA RATIO.  
 GREENFIELDS.  
 GREYFIELD SITE.  
 INFILL SITE.  
 LOW-EMITTING AND FUEL EFFICIENT VEHICLES.  
 LOW IMPACT DEVELOPMENT (LID).  
 PERMEABLE PAVING.  
 SOLAR REFLECTANCE.  
 SOLAR REFLECTANCE INDEX (SRI).  
 THERMAL EMITTANCE.  
 VANPOOL VEHICLE.  
 VEGETATED SPACE.

### SECTION A5.103 SITE SELECTION

**A5.103.1 Community connectivity.** Where feasible, locate project on a previously developed site within a  $\frac{1}{2}$  mile radius of at least ten basic services, readily accessible by pedestrians, including, but not limited, to one each of bank, place of worship, convenience grocery, day care, cleaners, fire station, barber shop, beauty shop, hardware store, laundry, library, medical clinic, dental clinic, senior care facility, park, pharmacy, post office, restaurant (two may be counted), school, supermarket, theater, community center, fitness center, museum or farmers market. Other services may be considered on a case-by-case basis.

**A5.103.2 Brownfield or greyfield site redevelopment or infill area development.** If feasible, select for development a brownfield in accordance with Section A5.103.2.1 or on a greyfield or infill site as defined in Section A5.102.

**A5.103.2.1 Brownfield redevelopment.** Develop a site documented as contaminated by means of an ASTM E1903-11 Phase II Environmental Site Assessment or on a site defined as a brownfield by a local, state or federal government agency. The site must be fully remediated in accordance with EPA regulations to the level required of the anticipated land use.

### SECTION A5.104 SITE PRESERVATION

**A5.104.1 Reduce development footprint and optimize open space.** Optimize open space on the project site in accordance with Sections A5.104.1.1, A5.104.1.2 or A5.104.1.3.

**A5.104.1.1 Local zoning requirement in place.** Exceed the zoning's open space requirement for vegetated open space on the site by 25 percent.

**A5.104.1.2 No local zoning requirement in place.** Provide vegetated open space area adjacent to the building equal to the building footprint area.

**A5.104.1.3 No open space required in zoning ordinance.** Provide vegetated open space equal to 20 percent of the total project site area.

### SECTION A5.105 DECONSTRUCTION AND REUSE OF EXISTING STRUCTURES

**A5.105.1** If feasible, disassemble existing buildings instead of demolishing to allow reuse or recycling of building materials.

**A5.105.1.1 Existing building structure.** Maintain at least 75 percent of existing building structure (including structural floor and roof decking) and envelope (exterior skin and framing) based on surface area.

#### Exceptions:

1. Window assemblies and nonstructural roofing material.
2. Hazardous materials that are remediated as a part of the project.
3. A project with an addition of more than two times the square footage of the existing building.

**A5.105.1.2 Existing nonstructural elements.** Reuse existing interior nonstructural elements (interior walls, doors, floor coverings and ceiling systems) in at least 50 percent of the area of the completed building (including additions).

**Exception:** A project with an addition of more than two times the square footage of the existing building.

**A5.105.1.3 Salvage.** Salvage additional items in good condition such as light fixtures, plumbing fixtures and doors as follows. Document the weight or number of the items salvaged.

1. Salvage for reuse on the project items that conform to other provisions of Title 24 in an on-site storage area.
2. Nonconforming items may be salvaged in dedicated collection bins for exempt projects or other uses.

### SECTION A5.106 SITE DEVELOPMENT

**A5.106.2 Storm water design.** Design storm water runoff rate, quantity and quality in conformance with Section A5.106.3 Low Impact Development (LID) or by local requirements, whichever are stricter.

**A5.106.3 Low Impact Development (LID).** All newly constructed projects shall mitigate (infiltrate, filter or treat) stormwater runoff from the 85<sup>th</sup> percentile 24-hour runoff event (for volume-based BMPs) or the runoff produced by a rain event equal to two times the 85<sup>th</sup> percentile hourly intensity (for flow-based BMPs) through the application of LID strategies. Employ at least two of the following methods or other best management practices to allow rainwater to soak into the ground, evaporate into the air or collect in storage

receptacles for irrigation or other beneficial uses. LID strategies include, but are not limited to:

1. Bioretention (rain gardens)/filtration planters;
2. Precipitation capture (Cisterns and rain barrels);
3. Green roofs meeting the structural requirements of the building code;
4. Roof leader or impervious area disconnection;
5. Permeable and porous paving;
6. Vegetative swales and filter strips; tree preservation; and
7. Tree preservation and tree plantings;
8. Landscaping soil quality;
9. Stream buffer; and
10. Volume retention suitable for previously developed sites.

**A5.106.3.1 Implementation.** If applicable, coordinate LID projects with the local Regional Water Quality Control Board, which may issue a permit or otherwise require LID.

**Note:** Further information on design of specific control measures may be found on US EPA’s website, on SWRCB’s website and from local boards that require LID.

**A5.106.3.2 Greyfield or infill site.** Manage 40 percent of the average annual rainfall on the site’s impervious surfaces through infiltration, reuse or evapotranspiration.

**A5.106.4 Reserved.**

**A5.106.4.1 Reserved.**

**A5.106.4.2 Reserved.**

**A5.106.4.3 Changing rooms.** For buildings with over 10 tenant-occupants, provide changing/shower facilities for tenant-occupants only in accordance with Table A5.106.4.3 or document arrangements with nearby changing/shower facilities.

**Note:** Additional information on recommended bicycle accommodations may be obtained from Sacramento Area Bicycle Advocates at <https://sacbike.org>.

**TABLE A5.106.4.3**

NUMBER OF TENANT- OCCUPANTS	SHOWER/ CHANGING FACILITIES REQUIRED <sup>2</sup>	2-TIER (12" X 15" X 72") PERSONAL EFFECTS LOCKERS <sup>1, 2</sup> REQUIRED
0-10	0	0
11-50	1 unisex shower	2
51-100	1 unisex shower	3
101-200	1 shower stall per gender	4
Over 200	1 shower stall per gender for each 200 additional tenant-occupants	One 2-tier locker for each 50 additional tenant-occupants

1. One 2-tier locker serves two people. Lockers shall be lockable with either padlock or combination lock.
2. Tenant spaces housing more than 10 tenant-occupants within buildings sharing common toilet facilities need not comply; however, such common shower facilities shall accommodate the total number of tenant-occupants served by the toilets and include a minimum of one unisex shower and two 2-tier lockers.

**A5.106.5.1 Designated parking for clean air vehicles.** In new projects or additions or alterations that add 10 or more vehicular parking spaces, provide designated parking for any combination of zero-emitting, fuel-efficient and carpool/vanpool vehicles as listed in code Sections A5.106.5.1.1 or A5.106.5.1.2.

**A5.106.5.1.1 Tier 1.** Provide 35 percent designated parking spaces of the total number of parking spaces, for any combination of zero-emitting, fuel-efficient and carpool/vanpool vehicles. Calculation for spaces shall be rounded up to the nearest whole number.

**Note:** Designated parking for clean air vehicles shall count toward the total parking spaces required by the local enforcing agencies.

**A5.106.5.1.2 Tier 2.** Provide 50 percent designated parking spaces of the total number of parking spaces, for any combination of zero-emitting, fuel-efficient and carpool/vanpool vehicles. Calculation for spaces shall be rounded up to the nearest whole number.

**Note:** Designated parking for clean air vehicles shall count toward the total parking spaces required by the local enforcing agencies.

**A5.106.5.1.3 Parking stall marking.** Paint, in the paint used for stall striping, the following characters such that the lower edge of the last word aligns with the end of the stall striping and is visible beneath a parked vehicle:

CLEAN AIR/  
VANPOOL/EV

**Note:** Vehicles bearing Clean Air Vehicle stickers from expired HOV lane programs may be considered eligible for designated parking spaces.

**A5.106.5.1.4 Vehicle designations.** Building managers may consult with local community Transit Management Associations (TMAs) for methods of designating qualifying vehicles, such as issuing parking stickers.

**Notes:**

1. Information on qualifying vehicles, car labeling regulations and DMV CAV decals may be obtained from the following sources:
  - a. California DriveClean.
  - b. California Air Resources Board.
  - c. US EPA fuel economy regulations and standards.
  - d. DMV Registration Operations.
2. Purchasing policy and refueling sites for zero-emitting vehicles for state employees use can be found at the Department of General Services.

**A5.106.5.3 Electric vehicle (EV) charging.** [N] Construction shall comply with Section A5.106.5.3.1 or A5.106.5.3.2, and in accordance with regulations in the *California Building Code* and the *California Electrical Code*.

**A5.106.5.3.1 Tier 1.** Table A5.106.5.3.1 shall be used to determine the number of EV capable spaces required. Refer to Section 5.106.5.3 for design space requirements.

When EV capable spaces are provided with EVSE to create EVCS per Table A5.106.5.3.1, refer to Section 5.106.5.3.2 for the allowed use of Level 2 or Direct Current Fast Charger (DCFC) and Section 5.106.5.3.3 for the allowed use of Automatic Load Management System (ALMS).

TABLE A5.106.5.3.1

TOTAL NUMBER OF ACTUAL PARKING SPACES	TIER 1 NUMBER OF REQUIRED EV CAPABLE SPACES	TIER 1 NUMBER OF EVCS (EV CAPABLE SPACES PROVIDED WITH EVSE) <sup>2</sup>
0–9	2	0
10–25	5	2
26–50	11	4
51–75	19	5
76–100	26	9
101–150	38	13
151–200	53	18
201 and over	30 percent of total parking spaces <sup>1</sup>	33 percent of EV capable spaces <sup>1</sup>

1. Calculation for spaces shall be rounded up to the nearest whole number.
2. The number of required EVCS (EV capable spaces provided with EVSE) in column 3 count toward the total number of required EV capable spaces shown in column 2.

**A5.106.5.3.2 Tier 2.** Table A5.106.5.3.2 shall be used to determine the number of EV capable spaces required. Refer to Section 5.106.5.3 for design requirements.

When EV capable spaces are provided with EVSE to create EVCS per Table A5.106.5.3.1, refer to Section 5.106.5.3.2 for the allowed use of Level 2 or Direct Current Fast Charger (DCFC) and Section 5.106.5.3.3 for the allowed use of Automatic Load Management System (ALMS).

TABLE A5.106.5.3.2

TOTAL NUMBER OF ACTUAL PARKING SPACES	TIER 2 NUMBER OF REQUIRED EV CAPABLE SPACES	TIER 2 NUMBER OF EVCS (EV CAPABLE SPACES PROVIDED WITH EVSE) <sup>2</sup>
0–9	3	0
10–25	8	3
26–50	17	6
51–75	28	9
76–100	40	13
101–150	57	19
151–200	79	26
201 and over	45 percent of total parking spaces <sup>1</sup>	33 percent of EV capable spaces <sup>1</sup>

1. Calculation for spaces shall be rounded up to the nearest whole number.
2. The number of required EVCS (EV capable spaces provided with EVSE) in column 3 count toward the total number of required EV capable spaces shown in column 2.

**A5.106.6 Parking capacity.** Design parking capacity to meet but not exceed minimum local zoning requirements.

**A5.106.6.1 Reduce parking capacity.** With the approval of the enforcement authority, employ strategies to reduce on-site parking area by

1. Use of on street parking or compact spaces, illustrated on the site plan or
2. Implementation and documentation of programs that encourage occupants to carpool, ride share or use alternate transportation.

**Note:** Strategies for programs may be obtained from local TMAs.

**A5.106.7 Exterior wall shading.** Meet requirements in the current edition of the *California Energy Code* and comply with either Section A5.106.7.1 or A5.106.7.2 for wall surfaces. If using vegetative shade, plant species documented to reach desired coverage within 5 years of building occupancy.

**A5.106.7.1 Fenestration.** Provide vegetative or man-made shading devices for all fenestration on east-, south- and west-facing walls.

**A5.106.7.1.1 East and west walls.** Shading devices shall have 30-percent coverage to a height of 20 feet or to the top of the exterior wall, whichever is less. Calculate shade coverage on the summer solstice at 10 AM for east-facing walls and at 3 PM for west-facing walls.

**A5.106.7.1.2 South walls.** Shading devices shall have 60-percent coverage to a height of 20 feet or to the top of the exterior wall, whichever is less.

**A5.106.7.2 Opaque wall areas.** Use wall surfacing with minimum SRI 25 (aged), for 75 percent of opaque wall areas.

**Exception:** Use of vegetated shade in Wildland-Urban Interface Areas as defined in Chapter 7A (Materials and Construction Methods for Exterior Wildfire Exposure) of the *California Building Code* shall meet the requirements of that chapter.

**Note:** If not available from the manufacturer, aged SRI value calculations may be found at the California Energy Commission's web site at [www.energy.ca.gov](http://www.energy.ca.gov).

**A5.106.11 Heat island effect.** Reduce nonroof heat islands by Section A5.106.11.1 and roof heat islands by Section A5.106.11.2.

**A5.106.11.1 Hardscape alternatives.** Use one or a combination of strategies 1 and 2 for 50 percent of site hardscape or put 50 percent of parking underground.

1. Use light colored materials with an initial solar reflectance value of at least 0.30 as determined in accordance with American Society for Testing and Materials (ASTM) Standards E1918 or C1549.
2. Use open-grid pavement system or pervious or permeable pavement system.

**A5.106.11.2 Cool roof for reduction of heat island effect.** Use roofing materials having a minimum aged solar reflectance and thermal emittance complying with Sections A5.106.11.2.1 and A5.106.11.2.2 or a minimum

# CALIFORNIA GREEN BUILDING STANDARDS CODE – MATRIX ADOPTION TABLE

## APPENDIX A5 – NONRESIDENTIAL VOLUNTARY MEASURES

### DIVISION A5.3 – WATER EFFICIENCY AND CONSERVATION

(Matrix Adoption Tables are nonregulatory, intended only as an aid to the code user.  
See Chapter 1 for state agency authority and building applications.)

Adopting agency	BSC	BSC-CG	SFM	HCD			DSA		OSHPD						BSCC	DPH	AGR	DWR	CEC	CA	SL	SLC
				1	2	1/AC	AC	SS	1	1R	2	3	4	5								
Adopt entire CA chapter		X																				
Adopt entire chapter as amended (amended sections listed below)																						
Adopt only those sections that are listed below																						
Chapter/Section																						

## APPENDIX A5

# NONRESIDENTIAL VOLUNTARY MEASURES

### Division A5.3 – WATER EFFICIENCY AND CONSERVATION

#### SECTION A5.301 GENERAL

##### A5.301.1 Scope.

#### SECTION A5.302 DEFINITIONS

**A5.302.1 Definitions.** The following words and terms shall, for the purposes of this chapter and as used elsewhere in this code, have the meanings shown herein.

**COMPACT DISHWASHER.**

**|| GRAYWATER.**

**MODEL WATER EFFICIENT LANDSCAPE ORDINANCE.**

**PLANTS.**

**POTABLE WATER.**

**RECYCLED WATER.**

**STANDARD DISHWASHER.**

**SUBMETER.**

#### SECTION A5.303 INDOOR WATER USE

**A5.303.2.3.1 Tier 1 – 12-percent savings.** A schedule of plumbing fixtures and fixture fittings that will reduce the overall use of potable water within the building by 12 percent shall be provided. The reduction shall be

based on the maximum allowable water use per plumbing fixture and fitting as required by the *California Building Standards Code*. The 12-percent reduction in potable water use shall be demonstrated by one of the following methods:

1. Prescriptive method. Each plumbing fixture and fitting shall not exceed the maximum flow rate at greater than or equal to 12-percent reduction as specified in Table A5.303.2.3.1; or
2. Performance method. A calculation demonstrating a 12-percent reduction in the building “water use baseline” as established in Table A5.303.2.2 shall be provided.

**A5.303.2.3.2 Tier 2 – 20-percent savings.** A schedule of plumbing fixtures and fixture fittings that will reduce the overall use of potable water within the building by 20 percent shall be provided. A calculation demonstrating a 20-percent reduction in the building “water use baseline” as established in Table A5.303.2.2 shall be provided.

**A5.303.2.3.3 25-percent savings.** A schedule of plumbing fixtures and fixture fittings that will reduce the overall use of potable water within the building by 25 percent shall be provided. A calculation demonstrating a 25-percent reduction in the building “water use baseline” as established in Table A5.303.2.2 shall be provided.

**A5.303.2.3.4 Nonpotable water systems for indoor use.** Utilizing nonpotable water systems (such as captured rainwater, treated graywater and recycled water) intended to supply water closets, urinals and other allowed uses, may be used in the calculations demonstrating the 12-, 20- or 25-percent reduction. The nonpotable water systems shall comply with the current edition of the *California Plumbing Code*.

**APPENDIX A5—NONRESIDENTIAL VOLUNTARY MEASURES**

**TABLE A5.303.2.2  
WATER USE BASELINE (PERFORMANCE METHOD)<sup>3</sup>**

FIXTURE TYPE	BASELINE FLOW RATE	DURATION	DAILY USES	OCCUPANTS <sup>2</sup>
Showerheads	1.8 gpm @ 80 psi	5 min.	1	X <sup>2a</sup>
Lavatory faucets nonresidential	0.5 gpm @ 60 psi	.25 min.	3	X
Kitchen faucets	1.8 gpm @ 60 psi	4 min.	1	X <sup>2b</sup>
Replacement aerators	2 gpm @ 60 psi			X
Wash fountains	1.8 gpm/20 [rim space (in.) @ 60 psi]			X
Metering faucets	0.20 gallons/cycle	.25 min.	3	X
Metering faucets for wash fountains	0.20 gallons/cycle/20 [rim space (in.) @ 60 psi]	.25 min.	1 male <sup>1</sup> 3 female	X
Gravity tank type water closets	1.28 gallons/flush	1 flush	1 male <sup>1</sup> 3 female	X
Flushometer tank water closets	1.28 gallons/flush	1 flush	1 male <sup>1</sup> 3 female	X
Flushometer valve water closets	1.28 gallons/flush	1 flush	1 male <sup>1</sup> 3 female	X
Electromechanical hydraulic water closets	1.28 gallons/flush	1 flush	1 male <sup>1</sup> 3 female	X
Urinals	0.5 or 0.125 <sup>4</sup> gallons/flush	1 flush	2 male	X

- The daily use number shall be increased to three if urinals are not installed in the room.
- Refer to Table 4-1, Chapter 4, 2022 *California Plumbing Code*, for occupant load factors.
  - Shower use by occupants depends on the type of use of a building or portion of a building, e.g., total occupant load for a health club, but only a fraction of the occupants in an office building as determined by the anticipated number of users.
  - Kitchen faucet use is determined by the occupant load of the area served by the fixture.
- Use worksheet WS-1 to calculate baseline water use.
- Floor-mounted urinals @ 0.5 GPF or wall-mounted urinals @ 0.125 GPF.

**TABLE A5.303.2.3.1  
FIXTURE FLOW RATES (PRESCRIPTIVE METHOD)**

FIXTURE TYPE	BASELINE FLOW RATE <sup>2</sup>	MAXIMUM FLOW RATE AT ≥ 12 PERCENT REDUCTION
Showerheads	1.8 gpm @ 80 psi	1.6 gpm @ 80 psi
Lavatory faucets nonresidential <sup>3</sup>	0.5 gpm @ 60 psi	0.35 gpm @ 60 psi
Kitchen faucets <sup>3</sup>	1.8 gpm @ 60 psi	1.6 gpm @ 60 psi
Wash fountains	1.8 gallons/cycle/20 [rim space (in.) @ 60 psi]	1.6 gpm/20 [rim space (in.) @ 60 psi]
Metering faucets	0.20 gallons/cycle	0.18 gallons/cycle
Metering faucets for wash fountains	0.20 gallons/cycle/20 [rim space (in.) @ 60 psi]	0.18 gallons/cycle 20 [rim space (in.) @ 60 psi]
Gravity tank type water closets	1.28 gallons/flush	1.12 gallons/flush <sup>1</sup>
Flushometer tank water closets	1.28 gallons/flush	1.12 gallons/flush <sup>1</sup>
Flushometer valve water closets	1.28 gallons/flush	1.12 gallons/flush <sup>1</sup>
Electromechanical hydraulic water closets	1.28 gallons/flush	1.12 gallons/flush <sup>1</sup>
Urinals	0.5 or 0.125 <sup>4</sup> gallons/flush	0.44 or 0.11 gallons/flush

- Includes water closets with an effective flush rate of 1.12 gallons or less when tested per ASME A 112.19.2 and ASME A 112.19.14.
- See Table A5.503.2.2 for additional notes and references.
- Where complying faucets are unavailable, aerators rated at 0.35 gpm or other means may be used to achieve reduction.
- Floor-mounted urinals @ 0.5 GPF or wall-mounted urinals @ 0.125 GPF.

# CALIFORNIA GREEN BUILDING STANDARDS CODE – MATRIX ADOPTION TABLE

## APPENDIX A5 – NONRESIDENTIAL VOLUNTARY MEASURES

### DIVISION A5.6 – VOLUNTARY TIERS

(Matrix Adoption Tables are nonregulatory, intended only as an aid to the code user.  
See Chapter 1 for state agency authority and building applications.)

Adopting agency	BSC	BSC-CG	SFM	HCD			DSA		OSHPD						BSCC	DPH	AGR	DWR	CEC	CA	SL	SLC
				1	2	1/AC	AC	SS	1	1R	2	3	4	5								
Adopt entire CA chapter		X																				
Adopt entire chapter as amended (amended sections listed below)																						
Adopt only those sections that are listed below																						
Chapter/Section																						

## APPENDIX A5

# NONRESIDENTIAL VOLUNTARY MEASURES

### Division A5.6 – VOLUNTARY TIERS

#### SECTION A5.601 CALGreen TIER 1 AND TIER 2

**A5.601.1 Scope.** The measures contained in this appendix are not mandatory unless adopted by local government as specified in Section 101.7. The provisions of this section outline means of achieving enhanced construction or reach levels by incorporating additional green building measures for newly constructed nonresidential buildings as well as additions and alterations. In order to meet one of the tier levels designers, builders or property owners are required to incorporate additional green building measures necessary to meet the threshold of each level. Refer to the provisions in Section 301.3 for nonresidential additions and alterations scope and application.

#### A5.601.2 CALGreen Tier 1

**A5.601.2.1 Prerequisites.** To achieve *CALGreen* tier status, a project must meet all of the mandatory measures in Chapter 5 and, in addition, meet the provisions of this section.

**A5.601.2.2 Energy performance.** For the purposes of mandatory energy efficiency standards in this code, the California Energy Commission will continue to adopt mandatory standards.

**A5.601.2.3 Tier 1.** Comply with the energy efficiency requirements in Section A5.203.1.1 and Section A5.203.1.2.1.

**A5.601.2.4 Voluntary measures for Tier 1.** In addition to the provisions of Sections A5.601.2.1 and A5.601.2.3 above, compliance with the following voluntary measures from Appendix A5 is required for Tier 1:

1. From Division A5.1,

- a. Comply with the designated parking requirements for fuel efficient vehicles for a minimum of 35 percent of parking capacity per Section A5.106.5.1.

- b. Electric vehicle (EV) charging [N] and Table A5.106.5.3.1 w/ footnotes.

- c. Comply with thermal emittance, solar reflectance or SRI values for cool roofs in Section A5.106.11.2 and Table A5.106.11.2.1.<sup>1</sup>

- d. Comply with one elective measure selected from this division.

2. From Division A5.2 comply with ONE of the following:

1. Outdoor lighting as described in A5.203.1.1.1.
2. Service water heating in restaurants as described in A5.203.1.1.2.
3. Warehouse Dock Seal Doors A5.203.1.1.3.
4. Daylight Design Power Adjustments 5.203.1.1.4.
5. Exhaust Air Heat Recovery A5.203.1.1.5.

3. From Division A5.3,

- a. Comply with the 12-percent reduction for indoor potable water use in Section A5.303.2.3.1.
- b. Comply with one elective measure selected from this division.

4. From Division A5.4,<sup>2</sup>

- a. Comply with recycled content of 10 percent of materials based on estimated total cost, or use two products from Table A5.405.4 for at least 75 percent by cost in Section A5.405.4.
- b. Comply with the 65-percent reduction in construction and demolition waste in Section A5.408.3.1.

- c. Comply with one elective measure selected from this division.
- 5. From Division A5.5,
  - a. Comply with resilient flooring systems for 90 percent of resilient flooring in Section A5.504.4.7.
  - b. Comply with thermal insulation meeting 2009 CHPS low-emitting materials list in Section A5.504.4.8.
  - c. Comply with one elective measure selected from this division.
- 6. Comply with one additional elective measure selected from any division.

<sup>1</sup> Cool roof is required for compliance with Tiers 1 and 2 and may be used to meet energy standards in Part 6, exceed energy standards and to mitigate heat island effect.

<sup>2</sup> Life cycle assessment compliant with Section A5.409.4 in this code may be substituted for prescriptive measures from Division A5.4.

### A5.601.3 CALGreen Tier 2.

**A5.601.3.2 Energy performance.** For the purposes of mandatory energy efficiency standards in this code, the California Energy Commission will continue to adopt mandatory standards.

**A5.601.3.3 Tier 2.** Comply with the energy efficiency requirements in Section A5.203.1.1 and Section A5.203.1.2.2.

**A5.601.3.4 Voluntary measures for Tier 2.** In addition to the provisions of Sections A5.601.3.1 and A5.601.3.3 above, compliance with the following voluntary measures from Appendix A5 and additional elective measures shown in Table A5.601.3.4 is required for Tier 2:

- 1. From Division A5.1,
  - a. Comply with the designated parking requirements for fuel efficient vehicles for a minimum of 50 percent of parking capacity per Section A5.106.5.1.
  - b. Electric vehicle (EV) charging [N] and Table A5.106.5.3.2 with footnotes.
  - c. Comply with thermal emittance, solar reflectance or SRI values for cool roofs in Section A5.106.11.2 and Table A5.106.11.2.2.<sup>1</sup>
  - d. Comply with three elective measures selected from this division.
- 2. From Division A5.2 comply with TWO of the following:
  - 1. Outdoor lighting as described in A5.203.1.1.1.
  - 2. Service water heating in restaurants as described in A5.203.1.1.2.
  - 3. Warehouse Dock Seal Doors A5.203.1.1.3.
  - 4. Daylight Design Power Adjustments 5.203.1.1.4.
  - 5. Exhaust Air Heat Recovery A5.203.1.1.5.

- 3. From Division A5.3,
  - a. Comply with the 20-percent reduction for indoor potable water use in Section A5.303.2.3.2.
  - b. Comply with three elective measures selected from this division.
- 4. From Division A5.4,<sup>2</sup>
  - a. Comply with recycled content of 15 percent of materials based on estimated total cost, or use two products from Table A5.405.4 for at least 75 percent by cost in Section A5.405.4.1.
  - b. Comply with the 80-percent reduction in construction and demolition waste in Section A5.408.3.1.
  - c. Comply with three elective measures selected from this division.
- 5. From Division A5.5,
  - a. Comply with resilient flooring systems for 100 percent of resilient flooring in Section A5.504.4.7.1.

**Exception:** Allowance may be permitted in Tier 2 for up to 5-percent specialty purpose flooring.

- b. Comply with thermal insulation meeting 2009 CHPS low-emitting materials list and no added formaldehyde in Section A5.504.4.8.1.
- c. Comply with three elective measures selected from this division.
- 6. Comply with three additional elective measures selected from any division.

<sup>1</sup> Cool roof is required for compliance with Tiers 1 and 2 and may be used to meet energy standards in Part 6, exceed energy standards and to mitigate heat island effect.

<sup>2</sup> Life cycle assessment compliant with Section A5.409.4 in this code may be substituted for prescriptive measures from Division A5.4.

**A5.601.4 Compliance verification.** Compliance with Section A5.601.2 or A5.601.3 shall be as required in Chapter 7 of this code. Compliance documentation shall be made part of the project record as required in Section 5.410.2 or 5.410.3.

CHAPTER 5 DIVISIONS		SECTION TITLE	CODE SECTION	Y	N/A	O	PLAN SHEET, SPEC OR ATTACH REFERENCE
(continued) <b>DIVISION 5.5 Environmental Quality</b>	Mandatory	Filters (with exceptions)	5.504.5.3				
	Mandatory	Filters: labeling	5.504.5.3.1				
	Mandatory	Environmental tobacco smoke (ETS) control	5.504.7				
	Mandatory	Indoor moisture control	5.505.1				
	Mandatory	Outside air delivery	5.506.1				
	Mandatory	Carbon dioxide (CO <sub>2</sub> ) monitoring	5.506.2				
	Mandatory	Acoustical control (with exception)	5.507.4				
	Mandatory	Exterior noise transmission, prescriptive method (with exceptions)	5.507.4.1				
	Mandatory	Noise exposure where noise contours are not readily available	5.507.4.1.1				
	Mandatory	Performance method	5.507.4.2				
	Mandatory	Site features	5.507.4.2.1				
	Mandatory	Documentation of compliance	5.507.4.2.2				
	Mandatory	Interior sound transmission (with note)	5.507.4.3				
	Mandatory	Ozone depletion and greenhouse gas reductions	5.508.1				
	Mandatory	Chlorofluorocarbons (CFCs)	5.508.1.1				
	Mandatory	Halons	5.508.1.2				
	Mandatory	Supermarket refrigerant leak reduction for retail food stores 8,000 square feet or more Sections 5.508.2 through 5.508.2.6.3	5.508.2 through 5.508.2.6.3				
		END OF MANDATORY PROVISIONS					

<b>Documentation Author's / Responsible Designer's Declaration Statement</b>	
<input type="checkbox"/> <b>Mandatory:</b> I attest that this mandatory provisions checklist is accurate and complete.	
Signature:	
Company:	Date:
Address:	License:
City/State/Zip:	Phone:

**A5.602.1**  
**CALGreen VERIFICATION GUIDELINES**  
**TIER 1 CHECKLIST**

**Application:** This checklist shall be used for nonresidential projects that meet the following: new construction, or building additions of 1,000 square feet or greater, or building alterations with a permit valuation of \$200,000 or more pursuant to Section 301.3, AND are adopting Tier 1 voluntary measures.

*Note: All applicable mandatory requirements in Chapter 5 shall be met prior to applying Tier 1 voluntary measures.*

**Instructions:**

Comply with all Tier 1 prerequisite measures from the various categories shown on the table below.

Add a “Y” to all mandatory and Tier 1 prerequisite measures in the appropriate columns.

Select the required number of additional electives from those categories shown on the table below and add a “Y” on the selected elective and add an “N” on the rest.

Count the total number of Tier 1 prerequisite measures plus the additional electives and write down the total number at the end of the checklist. Determine if the required number of Tier 1 measures have been selected to achieve Tier 1 compliance.

Y = Yes (section has been selected and/or included)

N = No (section has not been selected and/or included)

O = Other (provide explanation)

[N] = New construction pursuant to Section 301.3

[A] = Additions and/or Alterations pursuant to Section 301.3

CHAPTER 5 DIVISIONS		SECTION TITLE	CODE SECTION	Y	N	O	PLAN SHEET, SPEC OR ATTACH REFERENCE
<b>DIVISION 5.1 Planning and Design (continued)</b>	Mandatory	Storm water pollution prevention for projects that disturb less than 1 acre of land	5.106.1 through 5.106.2				
	Mandatory	Short-term bicycle parking	5.106.4.1.1				
	Mandatory	Long-term bicycle parking	5.106.4.1.2 through 5.106.4.1.5				
	<i>Tier 1 Prerequisite</i>	<i>Designated parking—35% of parking capacity w/ parking stall markings and stall identification</i>	<i>A5.106.5.1, A5.106.5.1.1, A5.106.5.1.3, A5.106.5.1.4</i>				
	Mandatory	Electric vehicle (EV) charging [N] w/ exceptions	5.106.5.3				
	Mandatory	EV capable spaces [N]	5.106.5.3.1				
	Mandatory	Electric vehicle charging stations (EVCS)	5.106.5.3.2				
	Mandatory	Use of automatic load management systems (ALMS)	5.106.5.3.3				
	Mandatory	Accessible EVCS	5.106.5.3.4				
	Mandatory	Note for EVCS signs					
	Mandatory	Table 5.106.5.3.1 w/ footnotes	5.106.3.1, 5.106.3.2 and 5.106.3.3				
	<i>Tier 1 Prerequisite</i>	<i>Electric vehicle (EV) charging [N] and Table A5.106.5.3.1 w/ footnotes</i>	<i>A5.106.5.3, A5.106.5.3.1</i>				
	Mandatory	Electric vehicle (EV) charging: medium-duty and heavy-duty [N]	5.106.5.4				
	Mandatory	Electric vehicle charging readiness requirements for warehouses, grocery stores and retail stores with planned off-street loading spaces [N]	5.106.5.4.1				
	Mandatory	Table 5.106.5.4.1	5.106.5.4 and 5.106.5.4.1				
	Mandatory	Light pollution reduction [N] (with exceptions, notes and table)	5.106.8 through 5.106.8.2				
	Mandatory	Grading and paving (exception for additions and alterations not altering the drainage path)	5.106.10				
	<i>Tier 1 Prerequisite</i>	<i>Cool roof (A5.106.11.2.2): SRI 75 when ≤ 2:12, SRI 16 when &gt; 2:12</i>	<i>A5.106.11.2</i>				

(continued)

CHAPTER 5 DIVISIONS			SECTION TITLE	CODE SECTION	Y	N	O	PLAN SHEET, SPEC OR ATTACH REFERENCE
(continued) <b>DIVISION 5.5 Environmental Quality</b>	<b>Select One Elective</b>	<i>Elective</i>	<i>Indoor air quality (IAQ) during construction</i>	<i>A5.504.1, A5.504.1.1, A5.504.1.2</i>				
		<i>Elective</i>	<i>IAQ postconstruction</i>	<i>A5.504.2</i>				
		<i>Elective</i>	<i>IAQ testing</i>	<i>A5.504.2.1, A5.504.2.1.1, A5.504.2.1.2, A5.504.2.1.3</i>				
		<i>Elective</i>	<i>No added formaldehyde Tier 1 (with notes)</i>	<i>A5.504.4.5.1</i>				
		<i>Elective</i>	<i>Hazardous particulates and chemical pollutants</i>	<i>A5.504.5</i>				
		<i>Elective</i>	<i>Entryway systems</i>	<i>A5.504.5.1</i>				
		<i>Elective</i>	<i>Isolation of pollutant sources</i>	<i>A5.504.5.2</i>				
		<i>Elective</i>	<i>Lighting and thermal comfort controls</i>	<i>A5.507.1, A5.507.1.1 through A5.507.1.2</i>				
		<i>Elective</i>	<i>Daylight</i>	<i>A5.507.2</i>				
		<i>Elective</i>	<i>Views</i>	<i>A5.507.3</i>				
		<i>Elective</i>	<i>Interior office spaces</i>	<i>A5.507.3.1</i>				
		<i>Elective</i>	<i>Multi-occupant spaces (with exceptions)</i>	<i>A5.507.3.2</i>				
		<i>Elective</i>	<i>Hydrochlorofluorocarbons (HCFCs)</i>	<i>A5.508.1.3</i>				
		<i>Elective</i>	<i>Hydrofluorocarbons (HFCs)</i>	<i>A5.508.1.4</i>				
Additional Measures			<i>Select 1 additional measure from any division</i>	Add section #				
Total number of Measures required				15				
Total number of Measures selected								

**Documentation Author's / Responsible Designer's Declaration Statement****Check the appropriate box(es) for the list below.**

- ☐ **Mandatory:** I attest that the mandatory provisions checklist is accurate and complete.
- ☐ **Tier 1 compliant:** I attest that the total number of voluntary measures selected meet or exceed the total number required to achieve Tier 1 compliance.
- ☐ **Partial Tier 1 compliant:** I attest that the total number of voluntary measures selected do not meet the total number required to achieve Tier 1 compliance: however, partial Tier 1 compliance has been achieved.

Signature:	
Company:	Date:
Address:	License:
City/State/Zip:	Phone:

# APPENDIX A5—NONRESIDENTIAL VOLUNTARY MEASURES

## A5.602.2 CALGreen VERIFICATION GUIDELINES TIER 2 CHECKLIST

**Application:** This checklist shall be used for nonresidential projects that meet the following: new construction, or building additions of 1,000 square feet or greater, or building alterations with a permit valuation of \$200,000 or more pursuant to Section 301.3, AND are adopting Tier 2 voluntary measures.

*Note: All applicable mandatory requirements in Chapter 5 shall be met prior to applying Tier 2 voluntary measures.*

### Instructions:

Comply with all Tier 2 prerequisite measures from the various categories shown on the table below.

Add a “Y” to all mandatory and Tier 2 prerequisite measures in the appropriate columns.

Select the required number of additional electives from those categories shown on the table below and add a “Y” on the selected elective and add an “N” on the rest.

Count the total number of Tier 2 prerequisite measures plus the additional electives and write down the total number at the end of the checklist. Determine if the required number of Tier 2 measures have been selected to achieve Tier 2 compliance.

Y = Yes (section has been selected and/or included)

N = No (section has not been selected and/or included)

O = Other (provide explanation)

[N] = New construction pursuant to Section 301.3

[A] = Additions and/or Alterations pursuant to Section 301.3

CHAPTER 5 DIVISIONS		SECTION TITLE	CODE SECTION	Y	N	O	PLAN SHEET, SPEC OR ATTACH REFERENCE
DIVISION 5.1 Planning and Design (continued)	Mandatory	Storm water pollution prevention for projects that disturb less than 1 acre of land	5.106.1 through 5.106.2				
	Mandatory	Short-term bicycle parking	5.106.4.1.1				
	Mandatory	Long-term bicycle parking	5.106.4.1.2 through 5.106.4.1.5				
	Tier 2 Prerequisite	Designated parking—50% of parking capacity w/ parking stall markings and stall identification	A5.106.5.1, A5.106.5.1.2, A5.106.5.1.3, A5.106.5.1.4				
	Mandatory	Electric vehicle (EV) charging [N] w/ exceptions	5.106.5.3				
	Mandatory	EV capable spaces [N]	5.106.5.3.1				
	Mandatory	Electric vehicle charging stations (EVCS)	5.106.5.3.2				
	Mandatory	Use of automatic load management systems (ALMS)	5.106.5.3.3				
	Mandatory	Accessible EVCS	5.106.5.3.4				
	Mandatory	Note for EVCS signs					
	Mandatory	Table 5.106.5.3.1 w/ footnotes	5.106.3.1, 5.106.3.2 and 5.106.3.3				
	Tier 2 Prerequisite	Electric vehicle (EV) charging [N] and Table A5.106.5.3.2 w/ footnotes	A5.106.5.3, A5.106.5.3.2				
	Mandatory	Electric vehicle (EV) charging: medium-duty and heavy-duty [N]	5.106.5.4				
	Mandatory	Electric vehicle charging readiness requirements for warehouses, grocery stores and retail stores with planned off-street loading spaces [N]	5.106.5.4.1				
	Mandatory	Table 5.106.5.4.1	5.106.5.4 and 5.106.5.4.1				
	Mandatory	Light pollution reduction [N] (with exceptions, notes and table)	5.106.8 through 5.106.8.2				
	Mandatory	Grading and paving (exception for additions and alterations not altering the drainage path)	5.106.10				
	Tier 2 Prerequisite	Cool roof (A5.106.11.2.2): SRI 82 when ≤ 2:12, SRI 27 when > 2:12	A5.106.11.2				

(continued)

# HISTORY NOTE APPENDIX

## 2022 California Green Building Standards Code California Code of Regulations, Title 24, Part 11

### HISTORY:

For prior history, see the History Note Appendix to the *California Green Building Standards Code*, 2019 Edition, effective January 1, 2020.

1. (BSC 03/21, HCD 03/21, DSA-SS 03/21, CEC 04/21)  
Repeal, amend and add provisions in the 2022 *California Green Building Standards Code* for residential, nonresidential and public-school buildings. Effective on January 1, 2023.
2. Erratum to correct editorial errors throughout Chapters 2, 4, 5, A4 and A5, effective January 1, 2023.




# Code Resources from ICC

## GUIDE TO THE 2022 CALIFORNIA GREEN BUILDING STANDARDS CODE: NONRESIDENTIAL

This guide was developed by the California Building Standards Commission for the purpose of assisting code users with application verification and enforcement of the 2022 California Green Building Standards Code, Part 11, Title 24, California Code of Regulations otherwise known as CALGreen (effective January 1, 2023).

SOFT COVER #4570S22

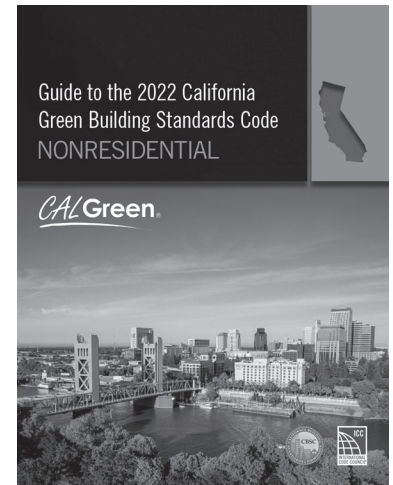

## GUIDE TO THE 2022 CALIFORNIA GREEN BUILDING STANDARDS CODE: RESIDENTIAL

Includes commentary, background, questions and answers, and helpful tools for the code user to better understand the mandatory and voluntary measures developed by the California Department of Housing and Community Development for residential structures.

SOFT COVER #4571S22



## Get Digitally Empowered and Enhance Your Code Experience with Premium Complete

- ✓ Search 1,000+ of the latest codes and standards
- ✓ Classify notes, files and videos into relevant code sections
- ✓ Share your access and content simultaneously
- ✓ View past committee code interpretations
- ✓ View full change history and public comments
- ✓ View real time code change proposals
- ✓ View updates and significant codes changes to I-Codes



[codes.iccsafe.org](https://codes.iccsafe.org)



Order your code tools today! 1-888-786-4452 | [shop.iccsafe.org](https://shop.iccsafe.org)



SOLAR RATING  
& CERTIFICATION  
CORPORATION™

# Solar Rating & Certification Corporation (ICC-SRCC)™

ICC-SRCC, a program of the ICC Evaluation Service, is an accredited certification body with programs for the certification and performance rating of solar heating and cooling products. ICC-SRCC certifications and ratings are specified by many incentive programs that promote the use of solar heating and cooling technologies. Consumers benefit from objective, third-party performance data that allows them to compare products and find the best options for their project.

ICC-SRCC's certifications and listings assist code enforcement professionals, allowing them to quickly confirm the code compliance of solar heating and cooling products. ICC-SRCC's consensus standards for solar thermal collectors and solar water heating systems are referenced in model codes throughout North America.

## **ICC-SRCC CERTIFIES:**

- Solar thermal collectors for air and water
- Domestic solar water heating systems
- Pump stations
- Solar pool heating systems

## **ICC-SRCC BENEFITS INCLUDE:**

- Evaluations of compliance to ICC-SRCC Standards 100, 300 and 400 that are referenced in codes throughout North America
- Objective performance ratings and energy savings estimates for solar water heaters
- Proof of compliance with the requirements of many incentive programs at the federal, state and local levels.
- Web-based directory of certifications with key product information and performance ratings

## **Need more information?**

Contact the Solar Rating & Certification Corporation today!

[www.solar-rating.org](http://www.solar-rating.org) | 1-888-422-7233 x7735